






HSF RoHS

SPECIFICATIONS

Housing: Thermoplastic, UL94V-0 (PBT)
 Color: Black
 Contact: Copper Alloy
 Shell: Zinc Alloy
 Voltage Current Rating: 1.0Amp. 250V AC
 Insulation Resistance: 500MΩ Min.
 Contact Resistance: 35mΩ Max.
 Dielectric Withstanding Voltage: 500V AC
 Temperature Range: -40°C to +105°C

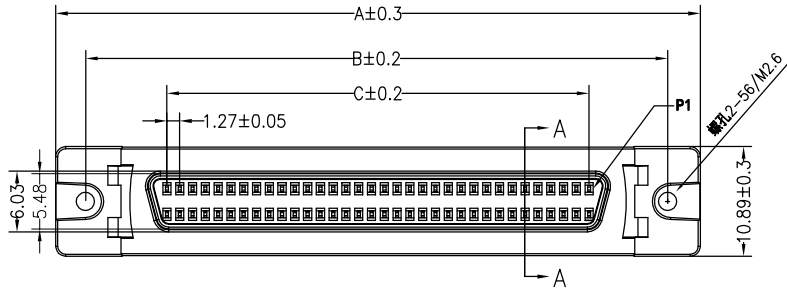


No. of Pin	DIMENSIONS				
	A	B	C	D	E
50	52.55	46.37	30.48	39.57	34.35
68	64.00	57.77	41.91	51.00	45.78
100	84.20	77.70	62.23	71.20	66.10

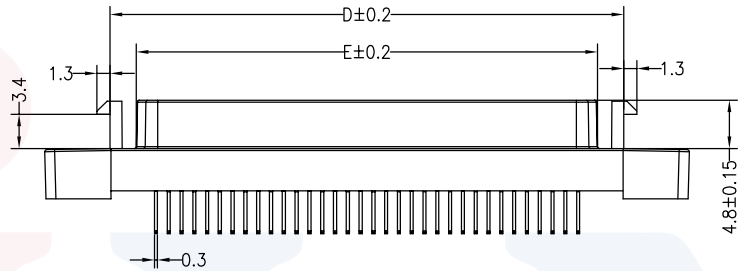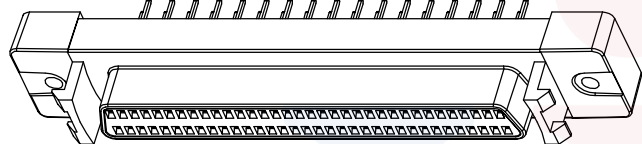


Ordering Information

6311-F XXX S D XX MNA OX


- No. of Pins: 50P, 68P, 100P
- Connector Type: S=Straight
- Contact Plating: G0:Gold Flash, S0:Gold Flash/Tin, S1:3U" Gold /Tin, S2:5U" Gold /Tin, S3:10U" Gold /Tin, S4:15U" Gold /Tin
- Journal Number: 01=R1 Type, 02=R2 Type, 03=with surew, 04=R1 Type M2.6, 05=R2 Type M2.6

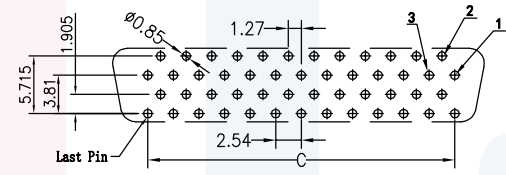


P.C. BOARD LAYOUT (50Pin) R1 Type / 正脚位

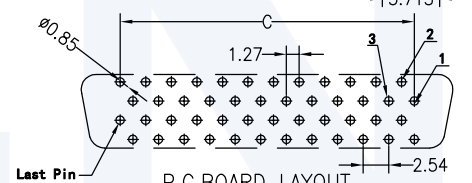

P.C. BOARD LAYOUT (68,100Pin) R1 Type / 正脚位

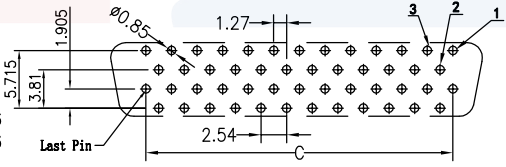

P.C. BOARD LAYOUT (50Pin) R2 Type / 反脚位

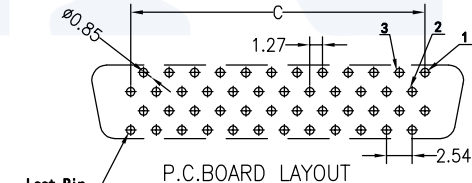

P.C. BOARD LAYOUT (68,100Pin) R2 Type / 反脚位

			OPERATION		DRAW	YiYuSheng	17.11.23	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
			X.X	±0.30				UNIT	mm		
			X.XX	±0.20	CHECK			SIZE	A4	PART NO.	6311FXXXSDXXMNAOX
			X.XXX	±0.10				SHEET	1/1	TITLE:	SCSI DB Female 180°
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE		PROJ.			

A

A