
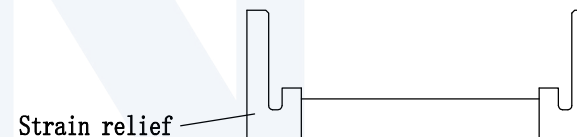


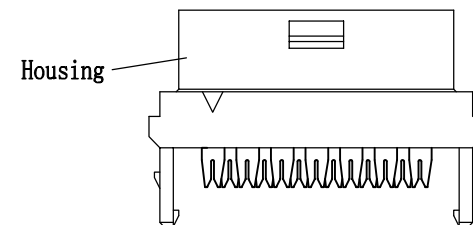



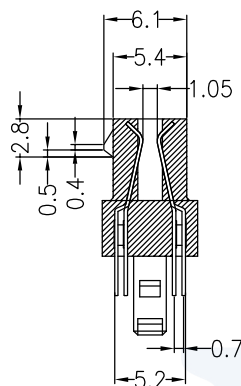
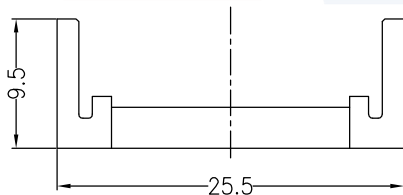
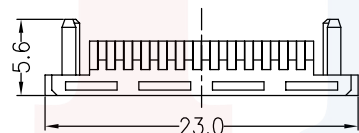
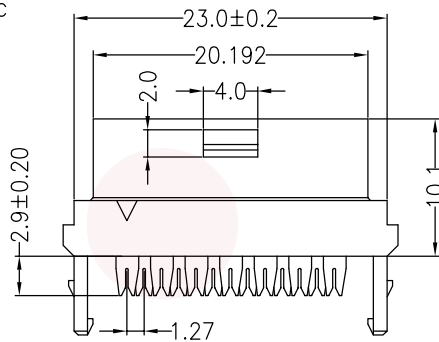


HSF RoHS

SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:35mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:500MΩ Min
 Operation Temperature:-40°C to +105°C
 Wire Accomodation:28AWG

Contact Material:Phosphor Bronze
 Contact Area Plated:Au or Sn Over Ni
 Insulator Material:PBT (UL94V-0)

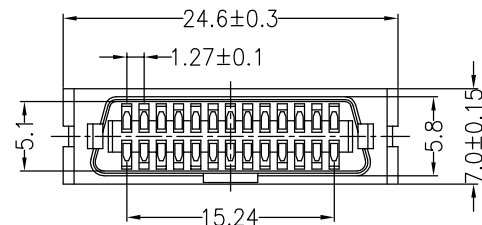

SCSI Four Type assemble

Ordering Information

6340F - 026 S I XX P N A 1

No.of Pins
26P

Contact Plating
S2:3U" Gold /Tin

OPERATION

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW

YiYuSheng

13.08.28

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD

Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.

6340F-026SIS2PNA1

TITLE:

SCSI D-Type Female 26P IDC Four Type

A

A0

2013.08.28

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9