

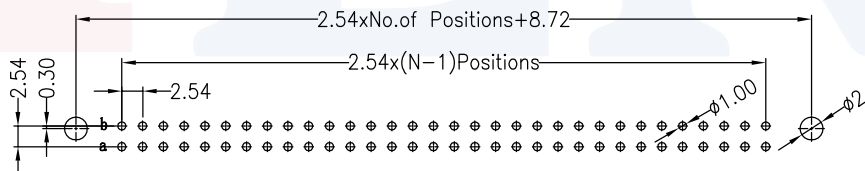
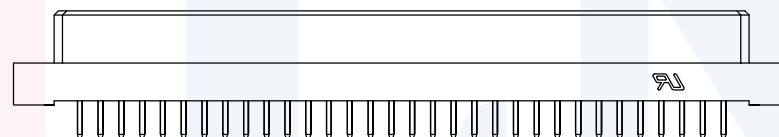
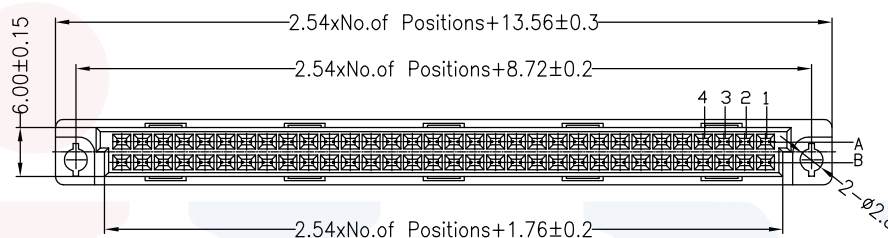




SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

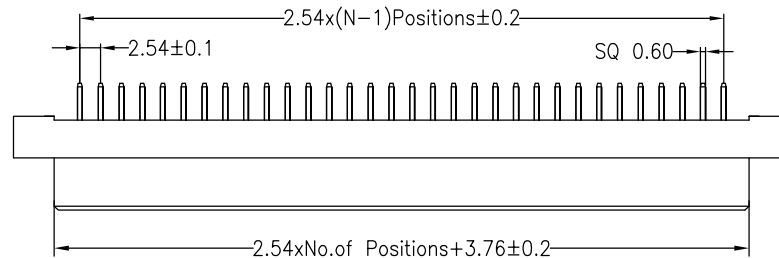

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

35112 XX B F S XX B NAX

No.of Pins
 10, 16, 20
 32, 44, 48
 64

Contact Type
 F=Female

Contact Plating
 G0:Gold Flash
 S0:Gold Flash/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin

Dimension antitheses list	
ITEM	A
Standard	4.00

A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YiYuSheng	14.09.16	SCALE	FIT	JILN® 深圳市锦凌电子有限公司		
					X.X	±0.30						SHENZHEN JINLING ELECTRONIC CO.,LTD		
B	2014.09.16		增加UL标识		X.XX	±0.20	CHECK				UNIT	mm	Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
A0	2012.04.10		NEW DRAWING		X.XXX	±0.10	APPROVE				SIZE	A4	PART NO.	35112XXBFSXXBNAX
					Angle	±3°							SHEET	1/1
					DIM	TOL					PROJ.			