

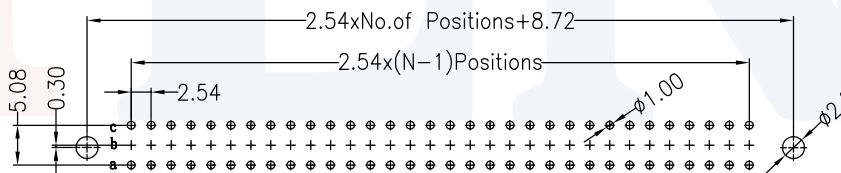

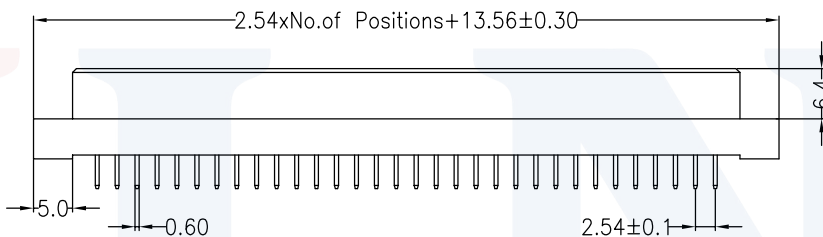


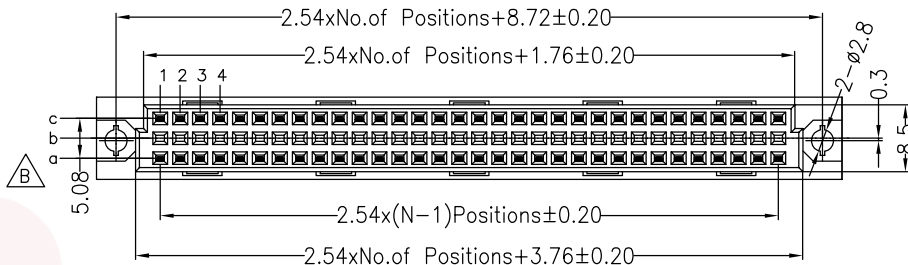

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

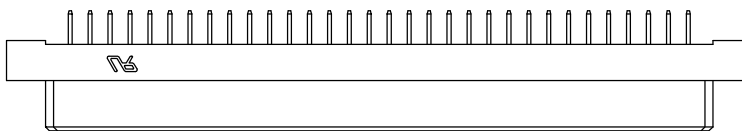

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	4.00

Ordering Information

35113 XX C F S XX BNAX

No.of Pins
20, 32, 64

Contact Type
F=Female

Contact Plating
 G0:Gold Flash
 S0:Gold Flash/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin
 S5:30U" Gold/Tin

				OPERATION	DRAW	YiYuSheng	16.07.05	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
				X.X ±0.30	CHECK			UNIT	mm		
B	2016.07.05	更正塑胶 A B C 方向		X.XX ±0.20				SIZE	A4		
A0	2015.03.28	NEW DRAWING		X.XXX ±0.10				SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ±3°	APPROVE			PROJ.	◆		PART NO.
				DIM TOL						TITLE:	DIN 41612 3xNpin 180° Female