
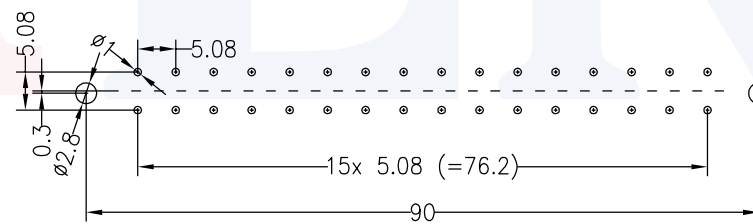

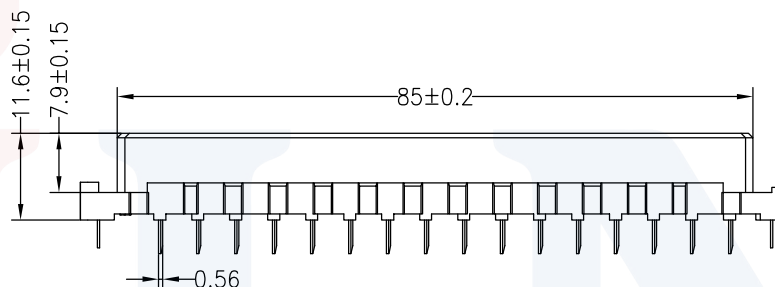


# HSF RoHS

## SPECIFICATIONS

Rated Current:6.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-55°C to +125°C

Contact Material:Phosphor Bronze  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

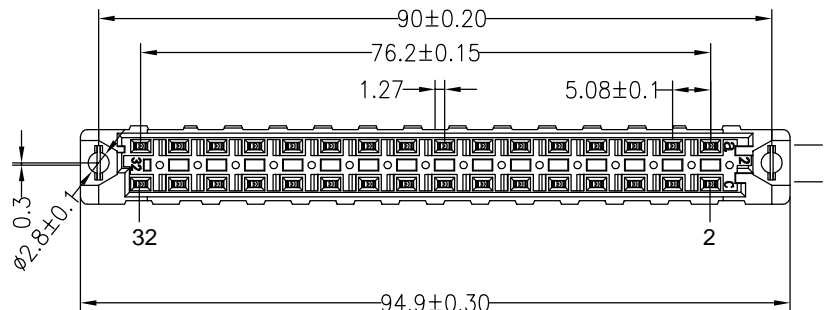

PCB LAYOUT(RECOMMENDED)

## Ordering Information

**3513 2 32 A F S XX BWA1**

No. of Pins  
32PIN

Contact Type  
F=Female

Contact Plating  
 G0:Gold Flash  
 S0:Gold Flash/Tin  
 S1:3U" Gold/Tin  
 S2:5U" Gold/Tin  
 S3:10U" Gold/Tin  
 S4:15U" Gold/Tin  
 S5:30U" Gold/Tin  
 SN:Tin

OPERATION		DRAW	YiYuSheng	20.06.13	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

**JILN**® 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

A1	2020.06.13	变更鱼叉规格	
A0	2017.03.24	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE

PART NO. 3513232AFSXXBWA1  
 TITLE: 欧式插座 5.08 高电流 直母带鱼叉  
 DIN41612 5.08mm high current  
 straight female with harpoon