
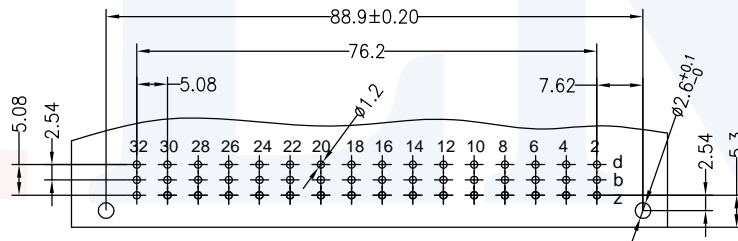
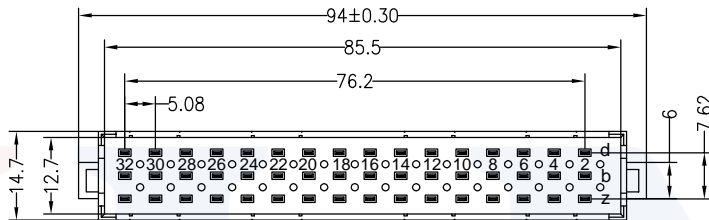



HSF RoHS

SPECIFICATIONS

Current rating: 5.6 Amps .
 Contact resistance: 20 mohms initial
 Insulation resistance: 100000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -55°C TO +125°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

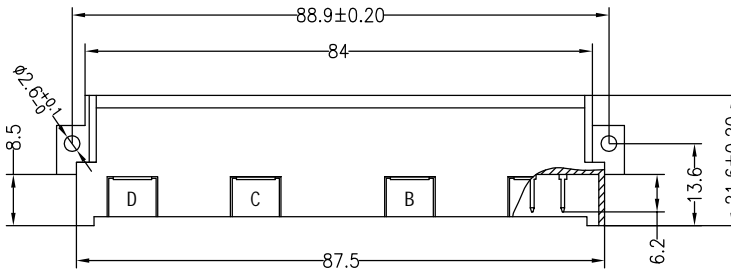

Ordering Information

3513 3 48 A M R XX BNA1

No.of Pins
48PIN

Contact Type
M=male

Contact Plating
 G0:Gold Flash
 S0:Gold Flash/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin
 S5:30U" Gold/Tin
 SN:Tin

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL. :±0.05)

OPERATION		DRAW	YiYuSheng	17.08.09
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

A0	2017.08.09	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE

PART NO. 3513348AMRXXBNA1
 TITLE: DIN 41612 of 5.08mm pitch large current 90° Male 348