

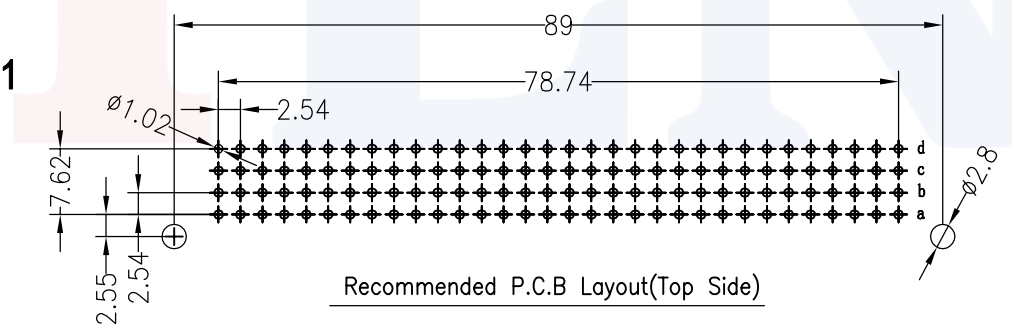



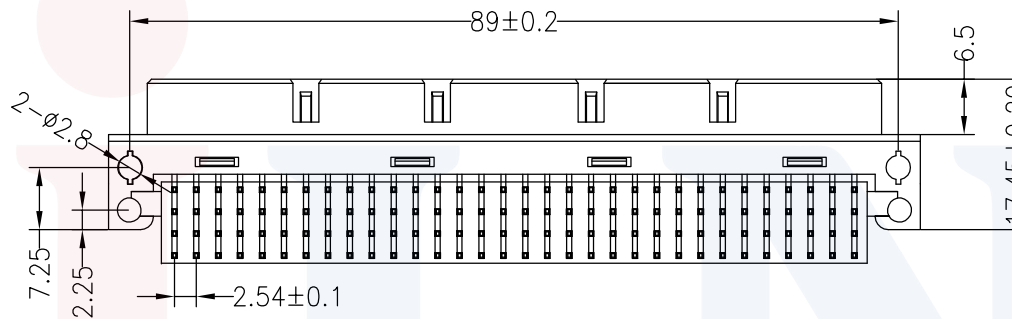

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

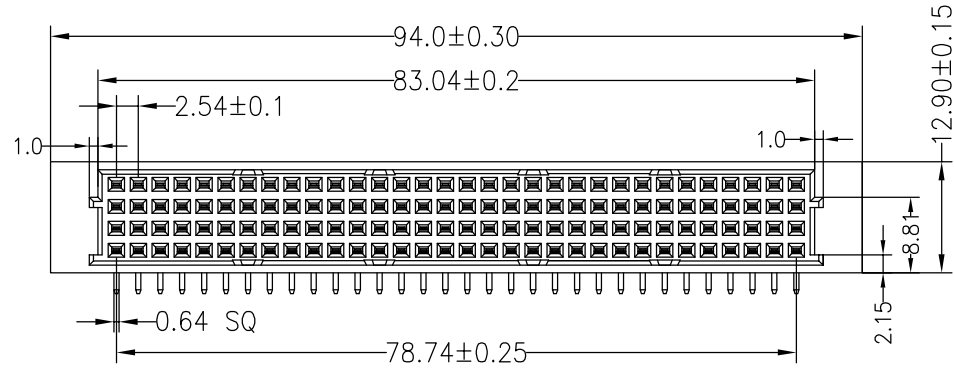

Recommended P.C.B Layout(Top Side)

Dimension antitheses list	
ITEM	A
Standard	3.00
Alternate	

Ordering Information

3511 4 128 A F R XX BNA1

- No.of Pins
4x32PIN
- Contact Type
M=Male
F=Female
- Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:2U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:30U" Gold/Tin
SN:Tin

A	A0	2015.04.25	NEW DRAWING	CHANGE	OPERATION	DRAW	YiYuSheng	15.04.25	SCALE	FIT	JILN 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992
	REV	DATE	MODIFICATION DESCRIPTION		X.X	±0.30			UNIT	mm	
					X.XX	±0.20	CHECK		SIZE	A4	
					X.XXX	±0.10			SHEET	1/1	
					Angle	±3°	APPROVE		PROJ.	PART NO. 35114128AFRXXBNA1 TITLE: DIN 41612 90° 4x32P Female	
					DIM	TOL					