

**HSF RoHS**

**SPECIFICATIONS**

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:500MΩ Min  
 Operation Temperature:-40°c to +105°c


Contact Material:Phosphor bronze  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA9T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 260°C for 10 seconds

**Ordering Information**

**4400- 2 23 M G1 F E B W 03**

No.of Pins  
2x23P

Contact Plating  
 G0:Gold Flash  
 G1:1U" Gold  
 G2:2U" Gold  
 G3:3U" Gold  
 G4:5U" Gold  
 G5:10U" Gold

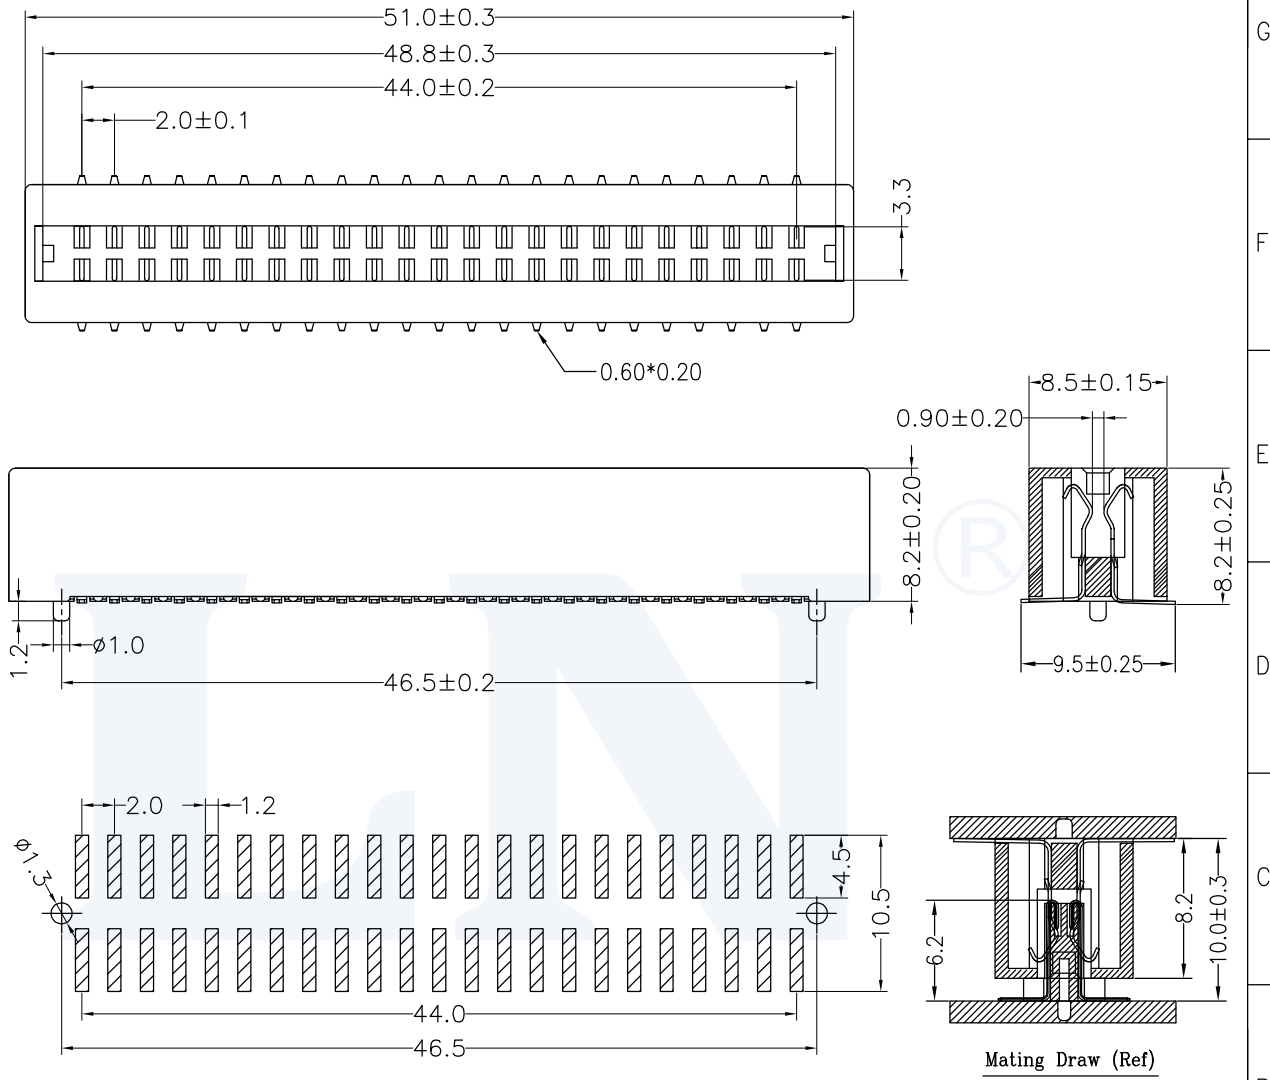

Recommended P.C.B Layout(Top Side)

				OPERATION		DRAW	yiyusheng	20.05.14	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4	PART NO. 4400-223MG1FEBW03		
				X.XXX	±0.10		SHEET	1/1				
A0	2020.05.14	NEW DRAWING		Angle	±3°	APPROVE		PROJ.	◆	TITLE:	2.0金手指连接器 2X23P 母座 SMT 带柱 H8.2	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							
1	2	3	4	5	6	7	8	9				