

HSF RoHS

**SPECIFICATIONS
PERFORMANCE**

Electical Rating:AC/DC 50V 0.5A

Insulation Resistance: 500MΩ

Contact Resistance:50mΩ Max

Withstang Volt:150V AC/minute




Opratng Temperature:-40°to+125°

Material

Contact:Phosphor Bronze Gold-Plated

Housing:PA46


Max.Processing Temp:230°C for30-60 seconds
(260°C for 10 seconds)

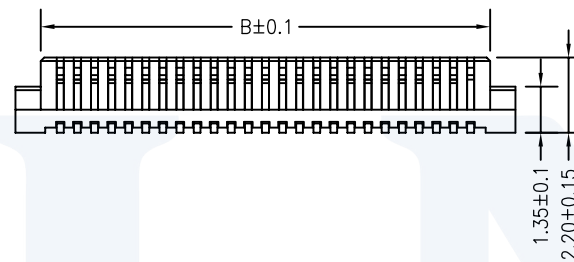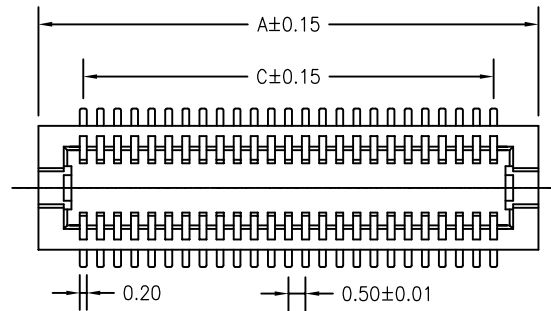

Ordering Information

3720 M XX 022 XX X X 01

No.of Pins	Plastics Height	Contact Plating	Insulator Material	Post
20P	H=2.2mm	G1:1U" Gold	Option	A=Tray
30P		G2:1.5U" Gold	D=BK-PA46	T=Tube
36P		G3:2U" Gold	R=Tape&Reel	
40P		G4:3U" Gold	F=BK-LCP	P=Membrane&Reel
50P		G5:5U" Gold		
60P		G6:10U" Gold		
80P		G7:15U" Gold		
		S0:Gold Flash/Tin		
		SN:Tin		

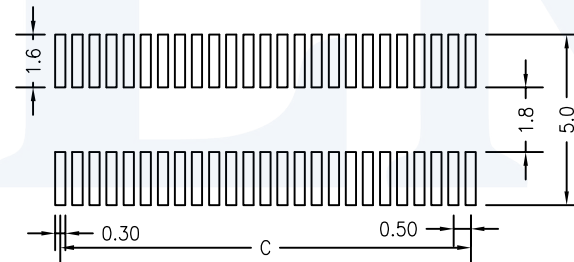

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NO.OF Contacts	Dimensions		
	A	B	C
20pin	7.10	5.64	4.50
30pin	9.62	8.14	7.00
36pin	11.12	9.64	8.50
40pin	12.12	10.64	9.50
50pin	14.62	13.14	12.00
60pin	17.12	15.64	14.50
80pin	22.12	20.64	19.50

				OPERATION		DRAW	JinChengXin	18.09.18	SCALE	FIT	JILN 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
				X.X	±0.30				UNIT	mm		
						CHECK			SIZE	A4	PART NO. 3720MXX022XXXX01	
									SHEET	1/1		
AO	2018.09.18	NEW DRAWING				APPROVE			PROJ.		TITLE: 0.5BTB-NPIN H=2.2公座 不带柱	
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	DIM TOL							