
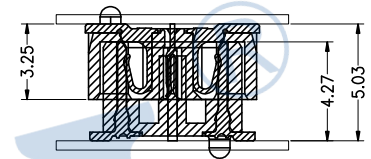




# HSF

**SPECIFICATIONS**  
**PERFORMANCE**

信号端子 Current Rating: 2A  
 电源端子 Current Rating: 25A  
 Insulation Resistance: 500MΩ  
 Withstang Volt: 175V AC/minute  
 Opratng Temperature: -55°C to +125°C  
 Material  
 Contact: Phosphor Bronze Gold-Plated  
 Housing: LCP  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

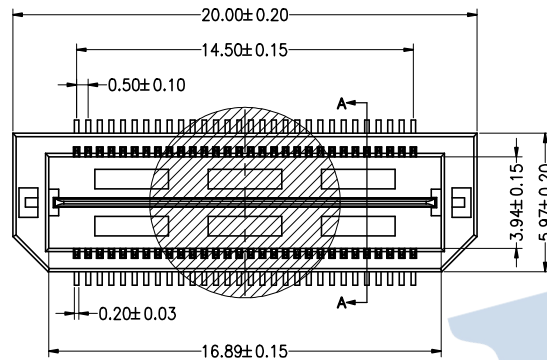

**Mating Draw (Ref)**

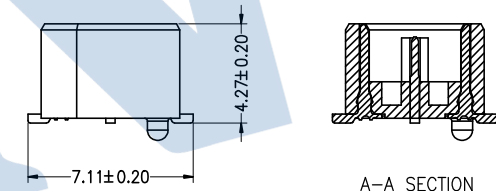
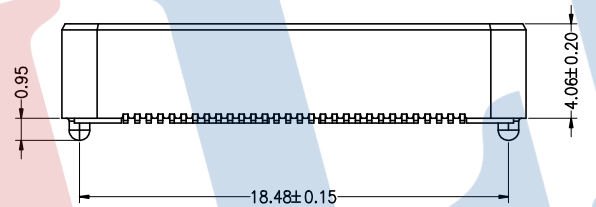


A-A SECTION

## Ordering Information

**3724 F 060 040 XX F X 0X**

F=Female  
 No.of pins 20P~100P  
 Plastic Hight 040=4.06mm  
 Contact Plating  
 G0:Gold Flash  
 G1:3U" Gold  
 G2:5U" Gold  
 G3:10U" Gold  
 G4:15U" Gold  
 S0:1.5U" Gold/Tin  
 S1:3U" Gold/Tin  
 Insulator Material Option  
 F=BK-LCP  
 Packing  
 T:Tube  
 R:Reel  
 code stream 01~99

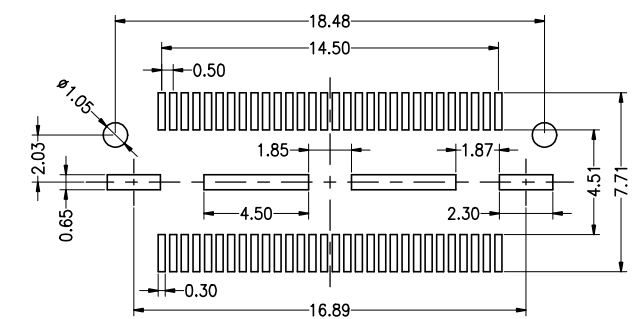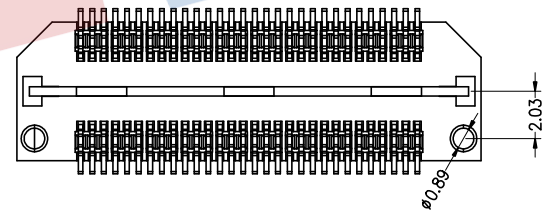

P.C.B Layout

				OPERATION		DRAW	Jelly Feng	2022.06.30	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel : 86-755-2997-5806/5802 Fax: 86-755-2997-5992			
				X.X	±0.30								CHECK	
				X.XX	±0.20	APPROVE						PART NO.		
				X.XXX	±0.10								DIM	TOL
A0	2022.06.30	NEW DRAWING		Angle	±3'									
REV	DATE	MODIFICATION DESCRIPTION		CHANGE										