



SPECIFICATIONS  
PERFORMANCE

Electical Rating: AC/DC 50V 0.5A  
 Contact Resistance: 80mΩ Max  
 Insulation Resistance: 500MΩ Min  
 Withstand Volt: 500V AC/minute  
 Opratng Temperature: -40°C to +105°C

Material

Contact: Phosphor Bronze Gold-Plated  
 Locating Plate: Brass Sn Over Ni  
 Housing: LCP UL94V0  
 Max. Processing Temp: 260°C ± 5° 5S

20~60P		0.12
>60P		0.15

Ordering Information

3724 M XXX 134 XX X X 0X

F=Female  
M=Male





No. of pins  
20P~100P

Plastic Hight  
134=13.4mm

Contact Plating  
G0: Gold Flash  
G1: 3U" Gold  
G2: 5U" Gold  
G3: 10U" Gold  
G4: 15U" Gold  
S0: 1.5U" Gold/Tin  
S1: 3U" Gold/Tin

Insulator Material Option  
D=BK-PA46  
E=BK-PA9T  
F=BK-LCP

Packing  
T: Tube  
R: Reel

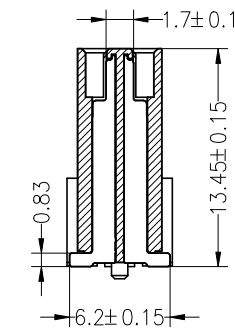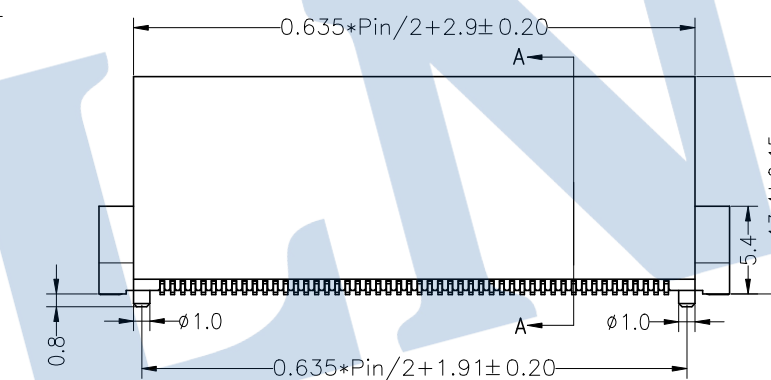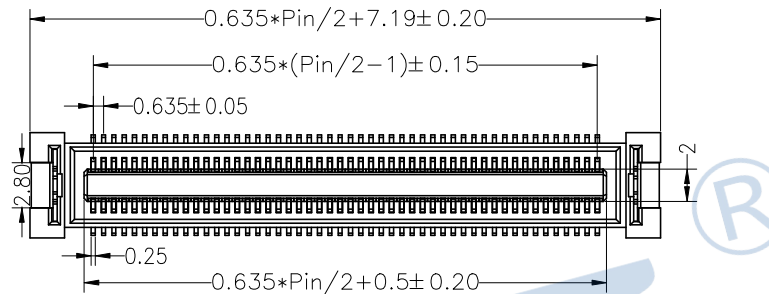

A-A SECTION

P.C.B Layout

OPERATION		DRAW	RICH LIN	22.07.08	SCALE	FIT
X.X	± 0.30					
X.XX	± 0.20	CHECK			UNIT	mm
X.XXX	± 0.10					
Angle	± 3°	APPROVE			SIZE	A4
DIM	TOL					
					SHEET	1/1
					PROJ.	

**JILN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONICS CO.,LTD  
 Tel: 86-755-27483253 Fax: 86-755-2997-5992

A

A0	2022.07.08	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE

PART NO.	3724MXXX134XXXX0X
TITLE:	0.635mm 浮动式BTB NPin H13.4 Male

A