

HSF RoHS

SPECIFICATIONS PERFORMANCE

Electical Rating:AC/DC 50V 0.5A
 Insulation Resistance: 500MΩ Min
 Contact Resistance:30mΩ Max
 Withstand Volt:200V AC/minute
 Opratng Temperature:-40°C to +105°C
 Material
 Contact:Phosphor Bronze Gold-Plated
 Housing:LCP
 Max.Processing Temp:260°C±5° 5S

Pin	Dimension mm			
	A	B	C	D
30	19.115	8.89	12.515	12.175
40	22.29	12.065	15.69	15.35
50	25.465	15.24	18.865	18.525
52	26.10	15.875	19.50	19.16

Ordering Information

3722 F XXX 157 XX X X OX

F=Female
M=Male



No.of pins
30,40,
50,52P

Plastic Hight
157=15.7mm

Contact Plating
 G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 S0:1.5U" Gold/Tin
 S1:3U" Gold/Tin

Insulator
Material
Option
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP

Packing
T:Tube
R:Reel

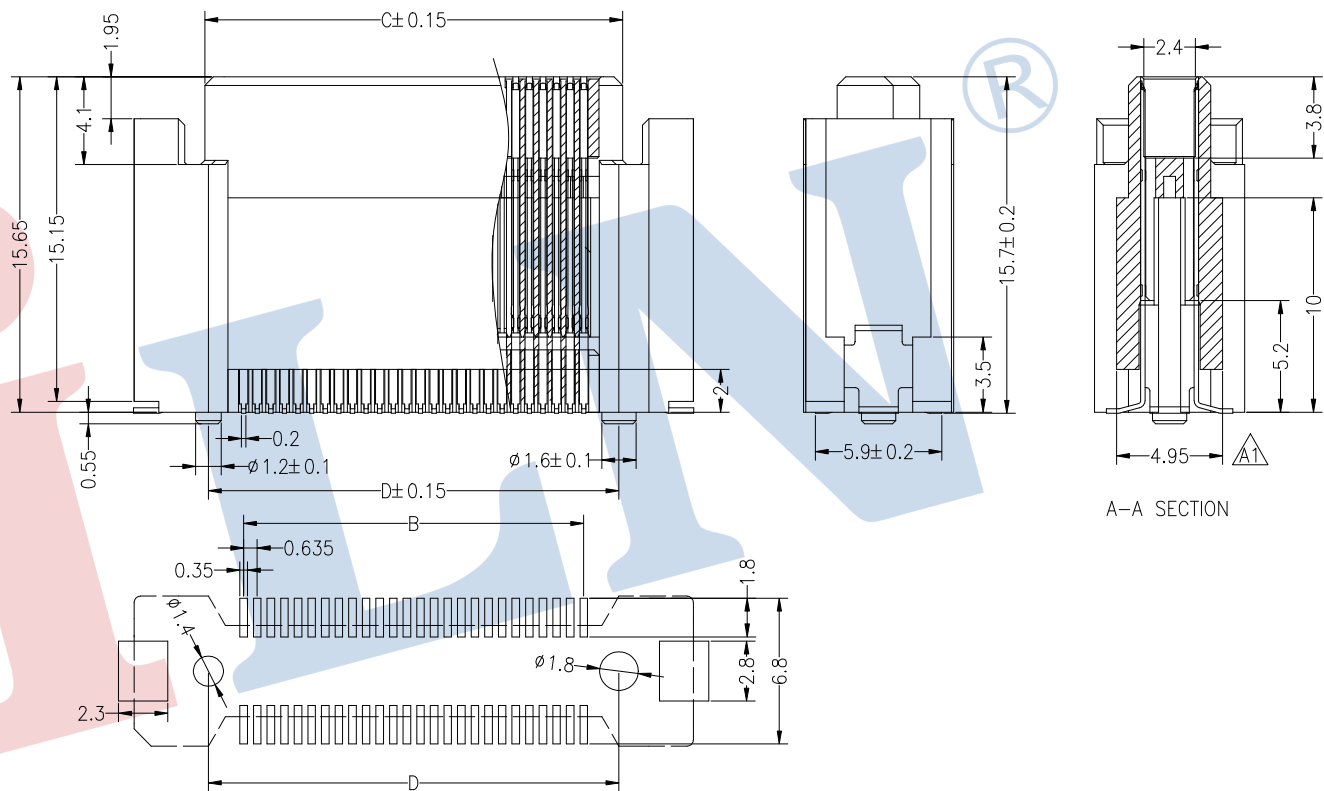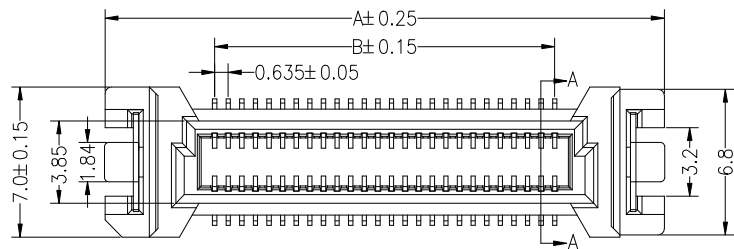

P.C.B Layout

OPERATION		DRAW	RICH LIN	22.07.08	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10					
Angle	±3°	APPROVE			SIZE	A4
DIM	TOL					
		SHEET			1/1	PART NO.

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2018.05.11	Thicken the insulator.	
A0	2022.07.08	NEW DRAWING	

PART NO. 3722FXXX157XXXXOX
 TITLE: 0.635mm BTB NPin H15.7 Female (PLC专用)