





HSF RoHS

SPECIFICATIONS
PERFORMANCE


Electical Rating: AC/DC 50V 0.8A
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstang Volt: 500V AC/minute
 Opratng Temperature: -40°C to +125°C

Material


Contact: Phosphor Bronze Gold-Plated
 Locating Plate: Brass Sn Over Ni
 Housing: LCP UL94V0
 Max.Processing Temp: 260°C ± 5°C 5S

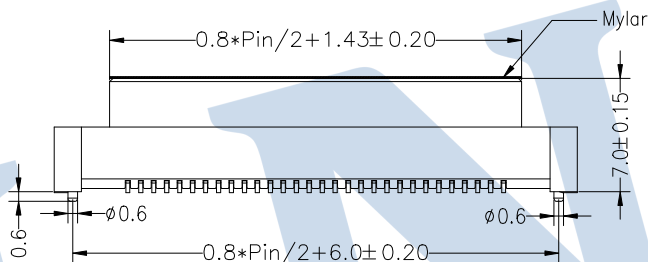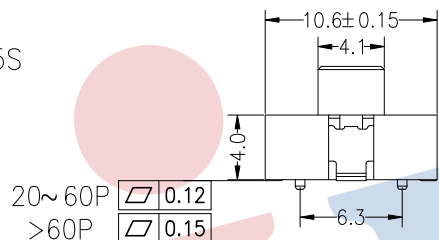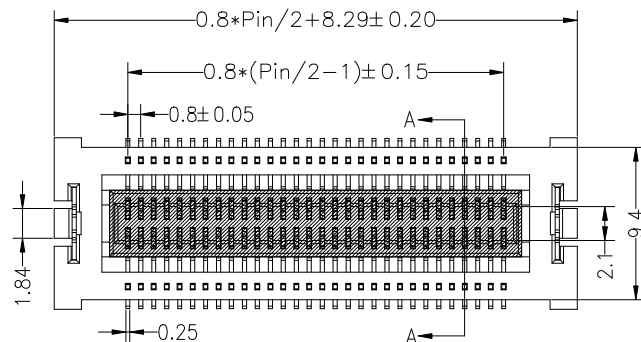

A-A SECTION

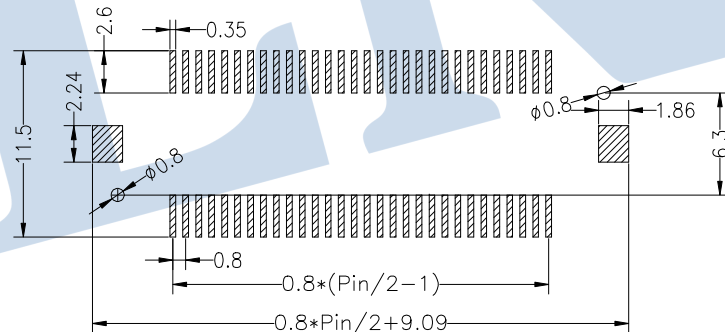

P.C.B Layout

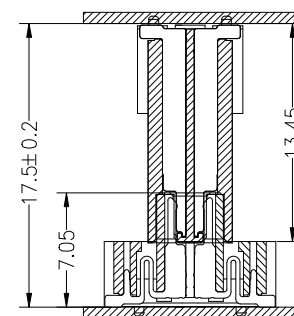

Mating Draw (Ref)

Ordering Information

3725 F XXX 070 XX F X OX

F=Female
M=Male
No.of pins
20P~100P
Plastic Hight
070=7.0mm
Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
S0:1.5U" Gold/Tin
S1:3U" Gold/Tin
Insulator Material Option
D=BK-PA46
E=BK-PA9T
F=BK-LCP
Packing
T:Tube
R:Reel

OPERATION

X.X	± 0.30
X.XX	± 0.20
X.XXX	± 0.10
Angle	± 3°
DIM	TOL

DRAW

Jelly Feng	22.08.18
CHECK	
APPROVE	

SCALE

FIT	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	∇

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD

Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.

3725FXXX070XXFXOX

TITLE:

0.8mm 浮动式 BTB NPin H7.0 Female

A

AO	2022.08.18	NEW DRAWING							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE						

A