




SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C, 10s(PBT insulator)

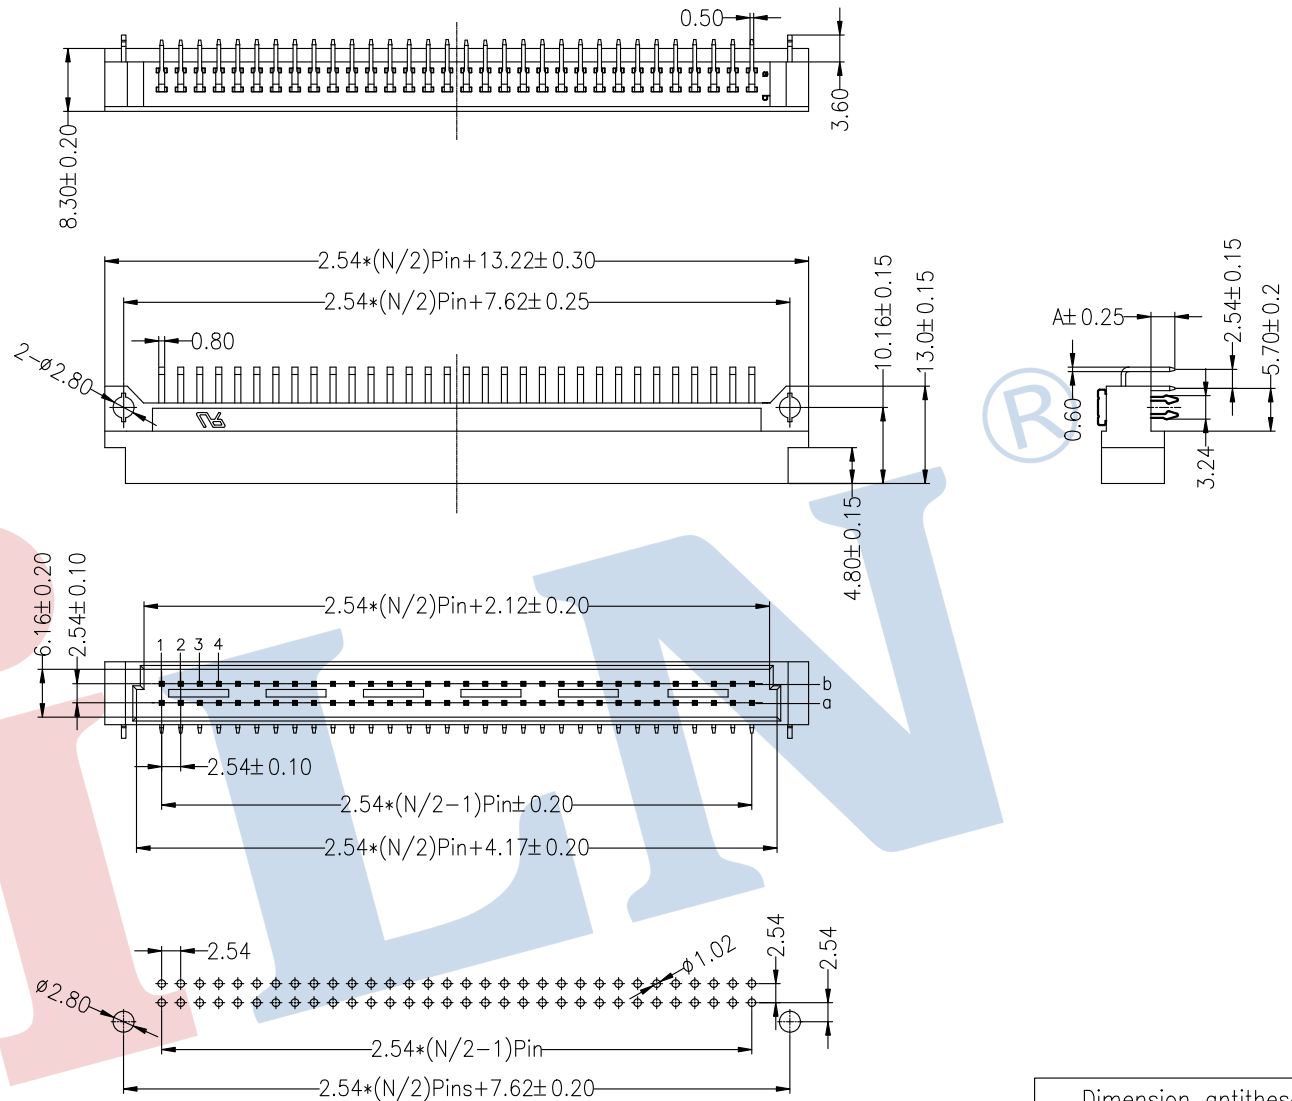

Ordering Information

35112 XX B M R XX BWA X

No.of Pins NPin N=10、16、20、 32、40、44、 48、50、64	Contact Type M=Male	Contact Plating G0:Gold Flash S0:Gold Flash/Tin S1:3U" Gold/Tin S2:5U" Gold/Tin S3:10U" Gold/Tin S4:15U" Gold/Tin	Stream Code
--	------------------------	---	-------------

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	2.90

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YiYuSheng	19.09.16	SCALE	FIT
				DIM	TOL				UNIT	mm
A0	2019.09.16	NEW DRAWING		X.X	±0.30	CHECK			SIZE	A4
				X.XX	±0.20				SHEET	1/1
				Angle	±3°				APPROVE	
									PROJ.	

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 35112XXBMRXXBWA
 TITLE: 欧式插座 公座 90度 2xNP 成品带鱼叉 系列图