


HSF RoHS

SPECIFICATIONS

Current rating: 15.0 Amps .
 Contact resistance: 20 mohms initial
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -55°C to +125°C

Contact Material: Phosphor Bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Resistance To Soldering Heat:
 245° C ± 5° C, 10s (PBT insulator)

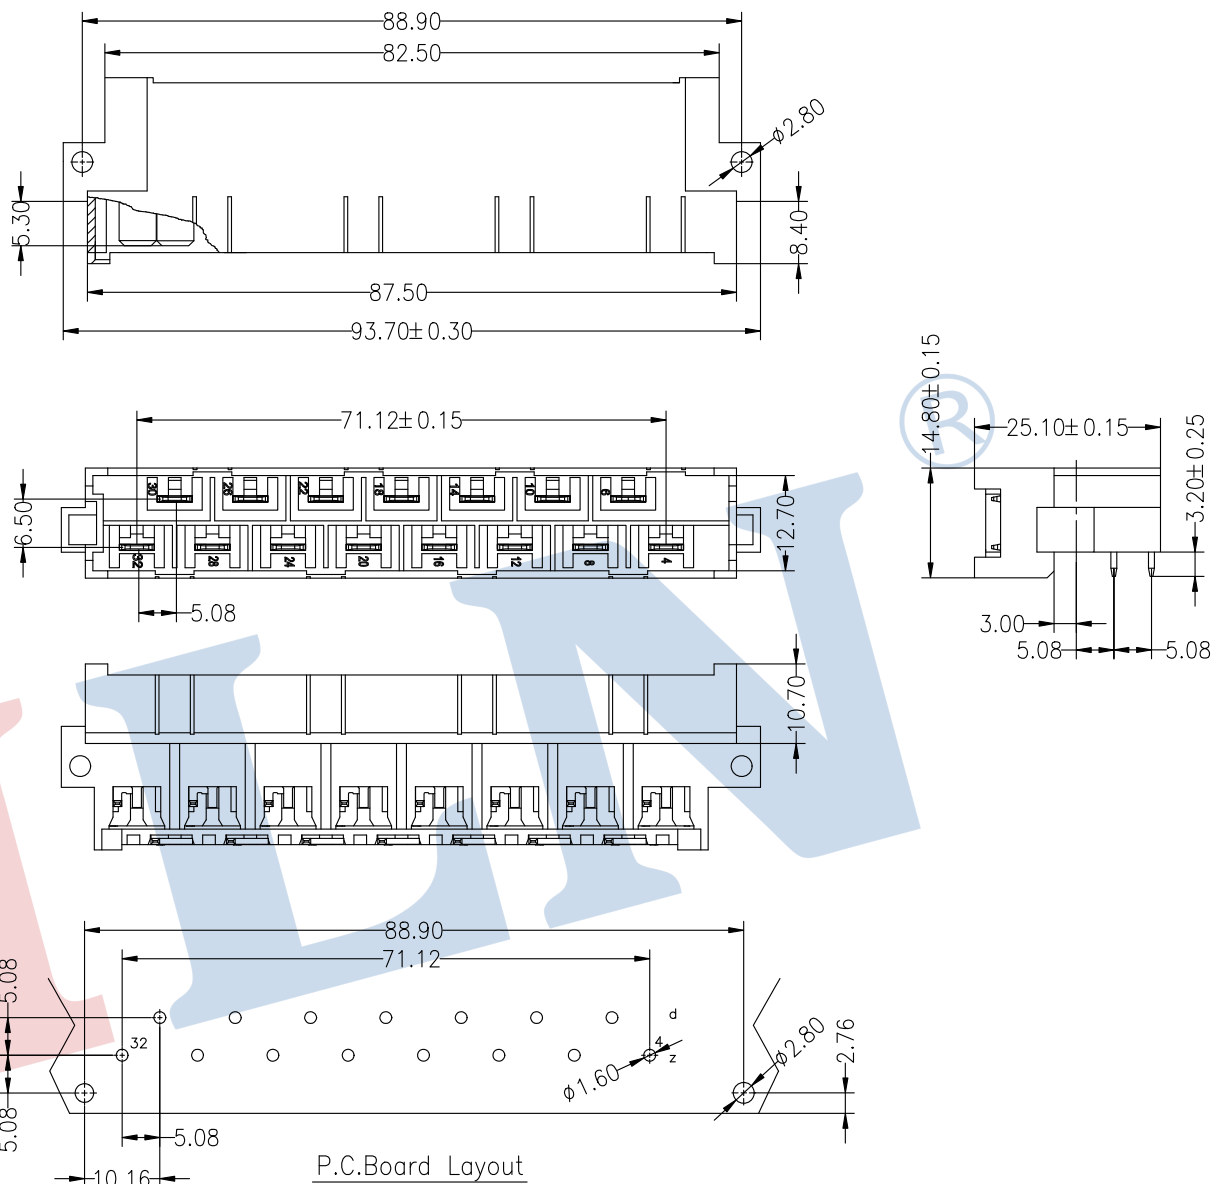

Ordering Information

3512 2 15 B M R XX B N 0X

No. of Pins
15PIN

Contact Type
M=Male

Contact Plating
S0:Gold Flash/Tin
SN:Tin

				OPERATION		DRAW		SCALE		FIT		JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30		YiYuSheng	19.10.12	UNIT	mm	PART NO.		3512215BMRXXBNOX
				X.XX	±0.20	CHECK			SIZE	A4	TITLE:		DIN 41612 H15 Type Male
A0	2019.10.12	NEW DRAWING		X.XXX	±0.10	APPROVE			SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL				PROJ.				