
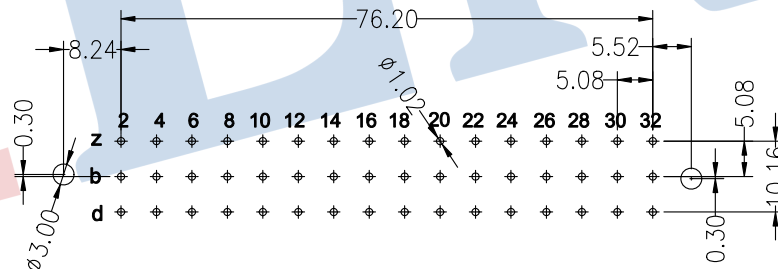
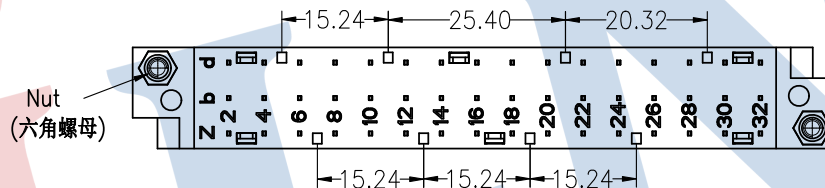
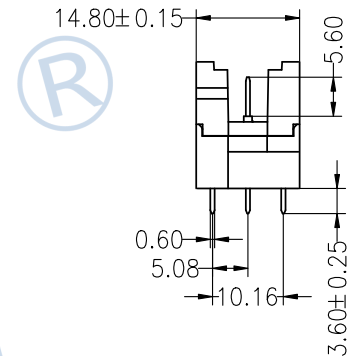
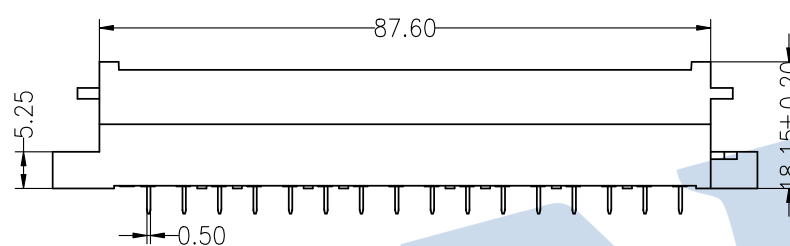


HSF RoHS

SPECIFICATIONS

Current rating: 5.6 Amps
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -40°C TO +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Resistance To Soldering Heat:
 245° C ± 5° C, 10s (PBT insulator)

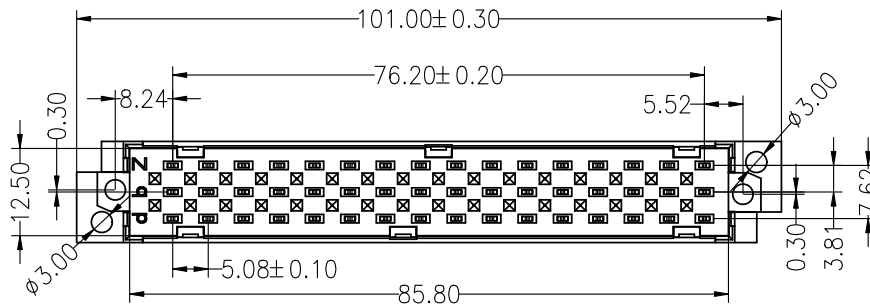

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

Ordering Information

35133 48 A M S XX B N A X

No. of Pins
48PIN

Contact Type
M= male

Contact Plating
 G0: Gold Flash
 S0: Gold Flash/Tin
 S1: 3U" Gold/Tin
 S2: 5U" Gold/Tin
 S3: 10U" Gold/Tin
 S4: 15U" Gold/Tin
 S5: 30U" Gold/Tin
 SN: Tin

Stream Code

Nut
 (六角螺母)

				OPERATION		DRAW	YiYuSheng	19.11.30	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20				SIZE	A4		
				X.XXX	±0.10				SHEET	1/1		
A0	2019.11.30	NEW DRAWING		Angle	±3°	APPROVE		PROJ.	◆	PART NO.	3513348AMSXXBNAX	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL					TITLE:	DIN 41612 of 5.08mm pitch large current 180° Male 348	