
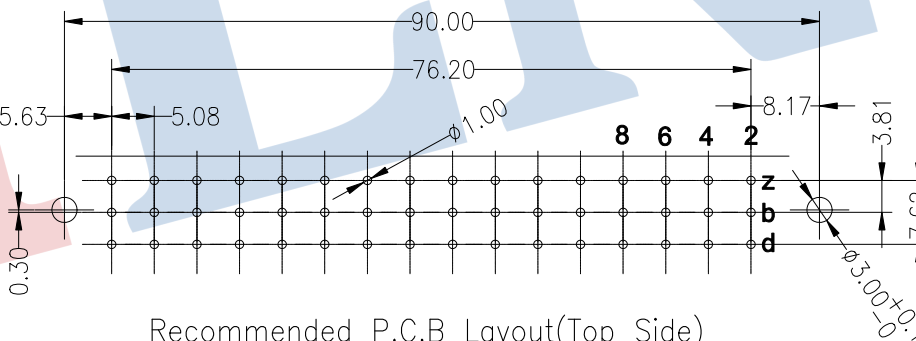
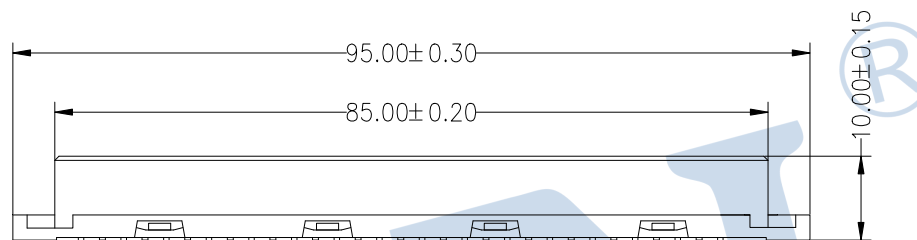


HSF RoHS

SPECIFICATIONS

Current rating: 5.6 Amps .
 Contact resistance: 20 mohms initial
 Insulation resistance: 100000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -55°C TO +125°C

Contact Material: Phosphor Bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Resistance To Soldering Heat:
 245° C ± 5° C, 10s (PBT insulator)

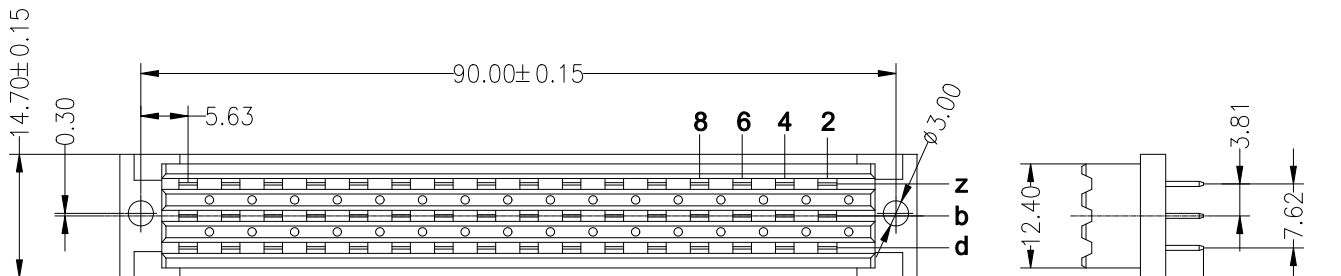

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

Ordering Information

35133 48 A F S XX B N A X

No. of Pins 48PIN	Contact Type F=Female	Contact Plating G0:Gold Flash S0:Gold Flash/Tin S1:3U" Gold/Tin S2:5U" Gold/Tin S3:10U" Gold/Tin S4:15U" Gold/Tin S5:30U" Gold/Tin SN:Tin	Stream Code
----------------------	--------------------------	---	-------------

OPERATION		DRAW	YiYuSheng	15.04.03	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	◆
DIM	TOL					

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 3513348AFSXXBNAX

TITLE: DIN 41612 of 5.08mm pitch large current F-type short plastic

A0	2015.04.03	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE