

**HSF RoHS**

**SPECIFICATIONS**

Rated Current:5.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT+30%G.F

Soldering Temperature:245°C±5°C 5S

**Ordering Information**


**35164 128 A F S XX B N A X**

No.of Pins  
128转64PIN

Contact Type  
F:Female

Contact Plating  
G0:Gold Flash  
S0:Gold Flash/Tin  
S1:2U" Gold/Tin  
S2:3U" Gold/Tin  
S3:5U" Gold/Tin  
S4:10U" Gold/Tin  
S5:15U" Gold/Tin  
S6:30U" Gold/Tin  
SM:2U" Gold/Matte-Tin

Stream Code

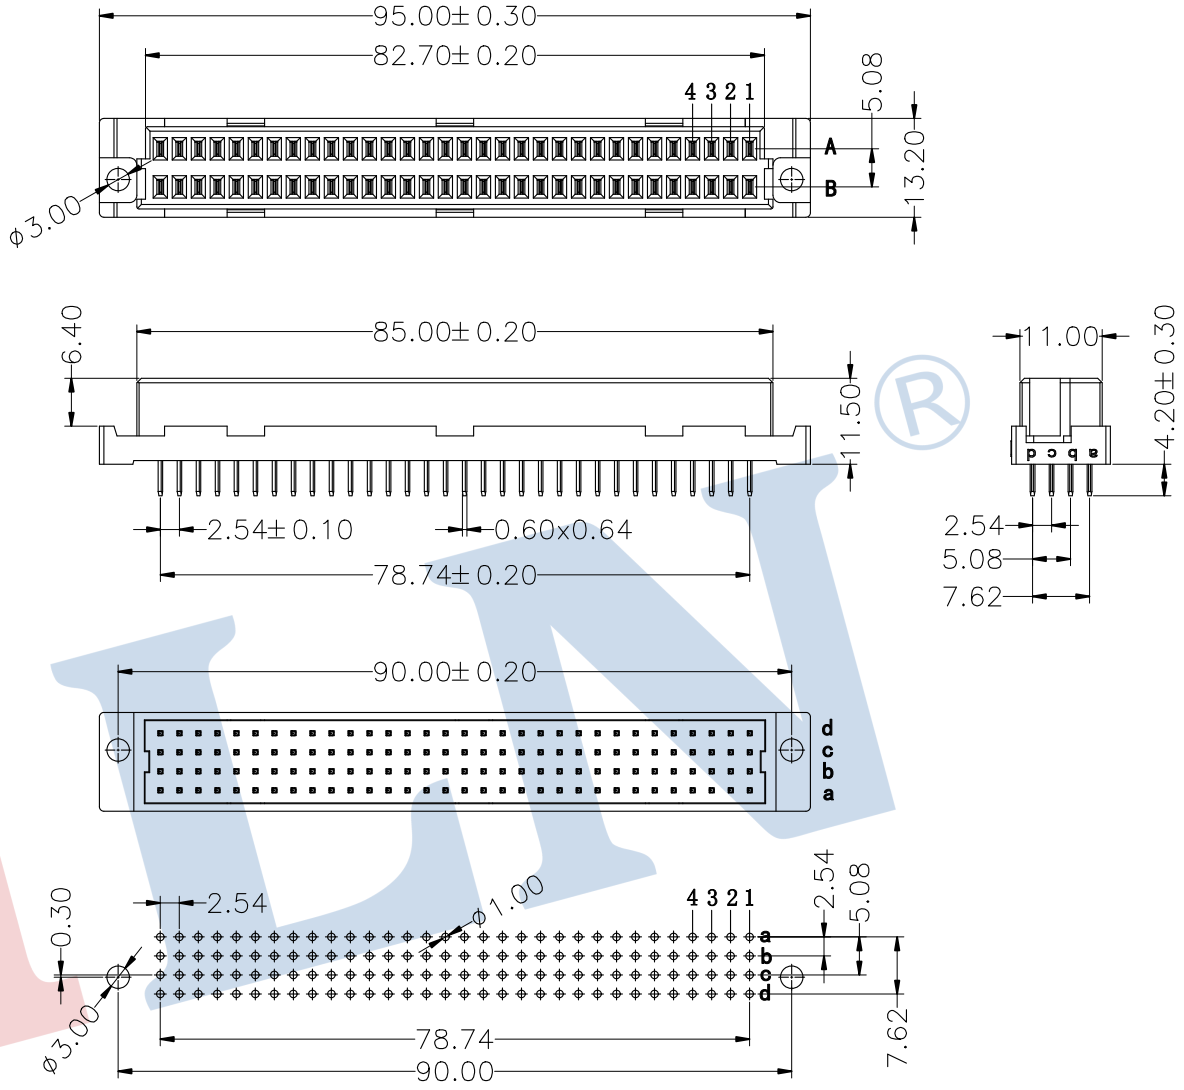

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW		SCALE		FIT		<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30	yiyusheng		19.05.11		UNIT			
				X.XX	±0.20	CHECK				SIZE		A4	
				X.XXX	±0.10	APPROVE				SHEET		1/1	
				Angle	±3°					PROJ.		TITLE:	
				DIM	TOL					PART NO.		35164128AFSXXBNAX	
										TITLE:		欧式插座 直母 128PIN转64PIN	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE									