

HSF RoHS

SPECIFICATIONS

Rated Current:6.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-55°C to +125°C




Contact Material:Phosphor Bronze

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:


245° C±5° C, 10s(PBT insulator)

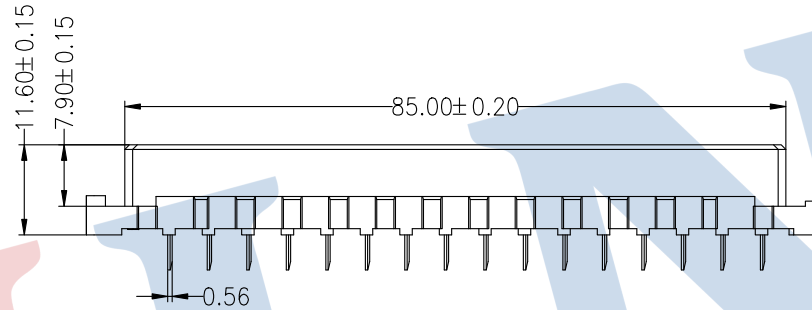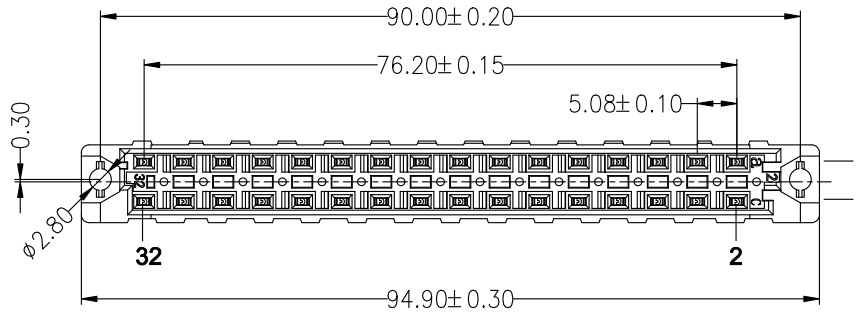

Ordering Information

3513 2 32 A F S XX B N A X

No. of Pins: 32PIN
 Contact Type: F=Female
 Contact Plating:
 G0:Gold Flash
 S0:Gold Flash/Tin
 S1:30U" Gold/Tin
 S2:50U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin
 S5:30U" Gold/Tin
 SN:Tin
 Stream Code

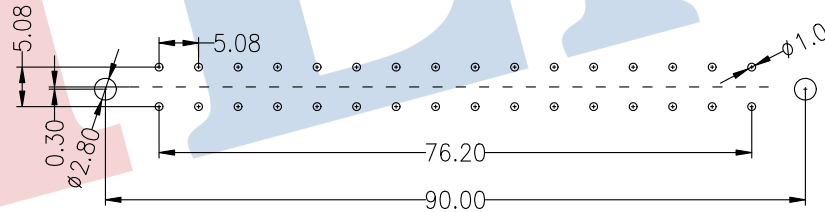

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	YiYuSheng	20.06.13	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	SIZE	A4				
				X.XXX	±0.10	APPROVE	SHEET	1/1				
A0	2017.03.24	NEW DRAWING		Angle	±3°			PROJ.		PART NO.	3513232AFSXXBNAX	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL					TITLE:	DIN41612 5.08mm high current straight female	