


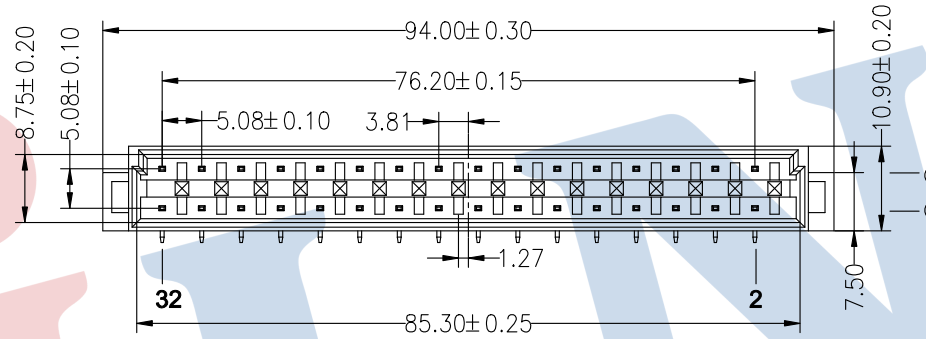


HSF RoHS

SPECIFICATIONS

Rated Current:6.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-55°C to +125°C


Contact Material:Phosphor Bronze
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245° C±5° C, 10s(PBT insulator)

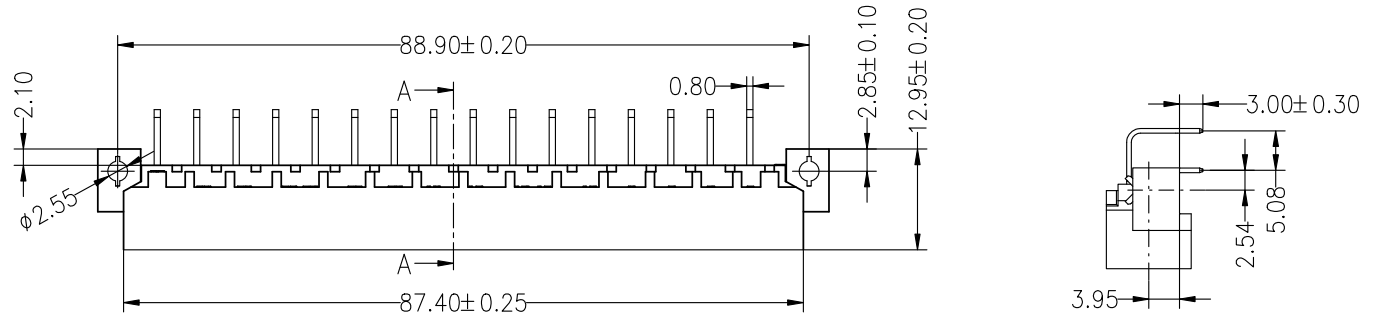

Ordering Information

3513 2 32 A M R XX B N A X

No.of Pins: 32PIN
 Contact Type: M=Male
 Contact Plating:
 G0:Gold Flash
 S0:Gold Flash/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin
 S5:30U" Gold/Tin
 SN:Tin
 Stream Code

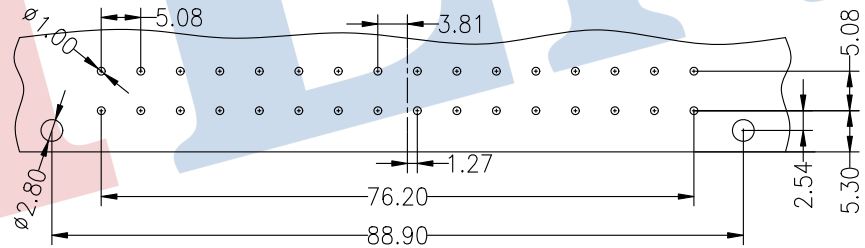

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	YiYuSheng	17.05.15	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4	PART NO. 3513232AMRXXBNAX		
				X.XXX	±0.10			SHEET	1/1			
A0	2017.05.15	NEW DRAWING		Angle	±3°	APPROVE		PROJ.	TITLE: DIN41612 5.08mm high current right angle male			
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							