



**HSF RoHS**

Specification:

- Contact Resistance: 35 m Ωhm Max.
- Insulation Resistance: 200 M Ωhm Min. At 500V DC.
- Contact Current Rating: 1 Amp AC/DC
- Voltage Rating: 40V AC.
- Withstanding Voltage: 500V AC For 1 Minute.
- Operating Temperature: -40°C to +105°C
- Packing: Tray
- Control Dimensions Indicated From "▲".

Material and Finish:

- Insulator Material: PBTUL94-V0,Black
- Cover Material: PBTUL94-V0,Black/White
- Hood Plastic Material: ABS,Black/White
- Bullon Plastic Material: ABS,Black/White
- Contact Material: Phosphor Bronze(C5191-EH)T=0.25
- Contact Area Plated: Gold 1~30u" Plated Over Nickel 50u".
- Solder Area Plated: Tin Plated(80u" min Lead Free)
- Up or Down Shell Material: SPCC T=0.50
- Up or Down Shell Plated:Nickel 80u" Plated Over Cu 50u"
- Connector Shell Material: SPCC T=0.50
- Connector Shell Plated: Gold 1~3u" Plated Over Cu 50u"
- Hook Spring Material: Stainless Steel T=0.30

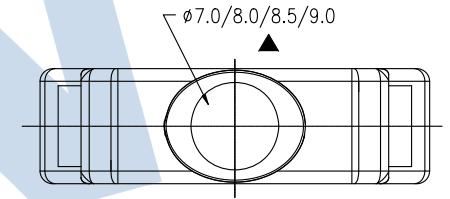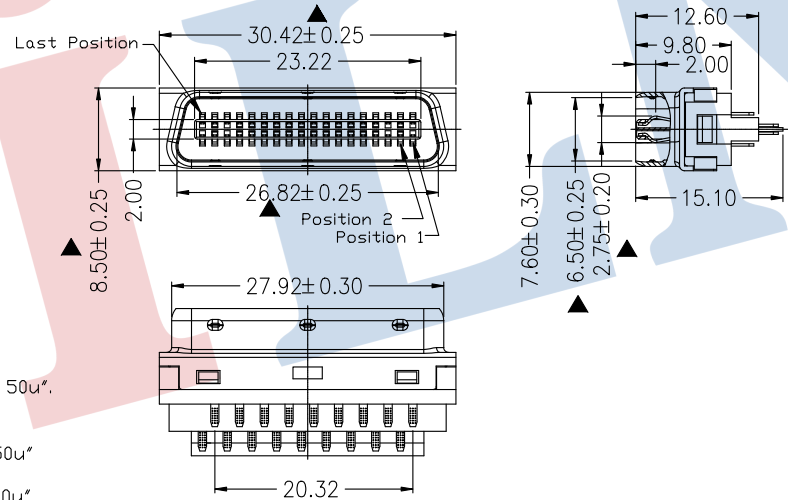

**Ordering Information**

**6320-M036 S D XX P N A 0 X**

No. of Pins	Connector Type	Contact Plating	Stream Code
14,20P,26P,36P,50P	S=Strait	G1:1U" Gold G4:3U" Gold G5:5U" Gold S1:1U" Gold /Tin S2:3U" Gold /Tin S3:5U" Gold /Tin	

				OPERATION		DRAW	Jelly Feng	23.02.15	SCALE	FIT
				X.X	±0.30					
				X.XX	±0.20	CHECK			UNIT	mm
				X.XXX	±0.10				SIZE	A4
A0	2017.06.22	NEW DRAWING		Angle	±3°	APPROVE			SHEET	1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL				PROJ.	

**JILN**® 深圳市锦凌电子有限公司  
**SHENZHEN JINLING ELECTRONICS CO.,LTD**  
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO.		6320-M036SDXXPNA0X	
TITLE:		HPCN 36P SCSI Solder-type Male	