
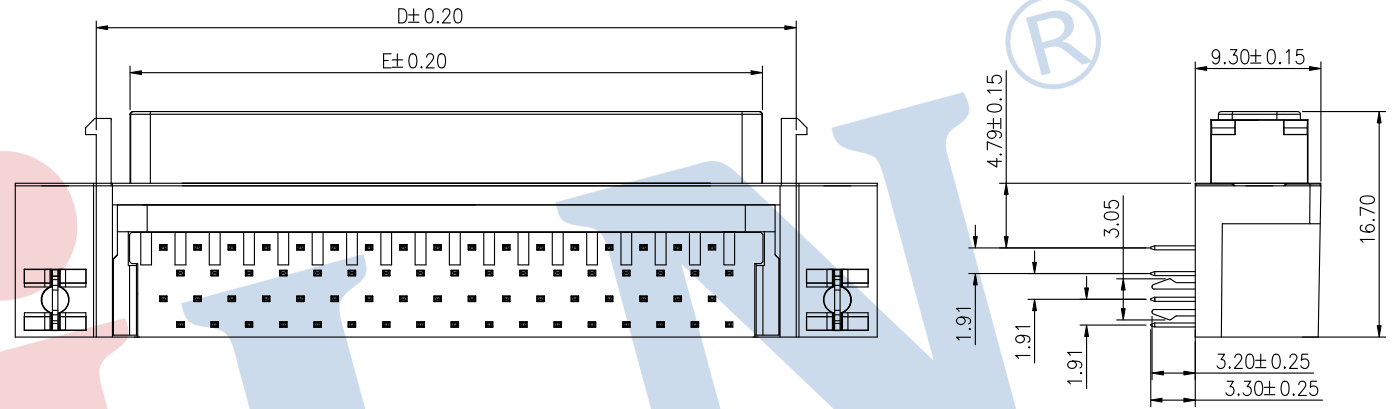


**HSF RoHS**

**SPECIFICATIONS**

Housing: Thermoplastic,PBT,UL94V-0  
 Color: Black  
 Contact:Copper Alloy  
 Shell:Zinc Alloy  
 Voltage Current Rating:1.0AMP.250V AC  
 Insulation Resistance:500MΩ Min.  
 Contact Resistance:30mΩ Max.  
 Dielectric Withstanding Voltage:500V AC  
 Temperature Range:-40°C to +105°C


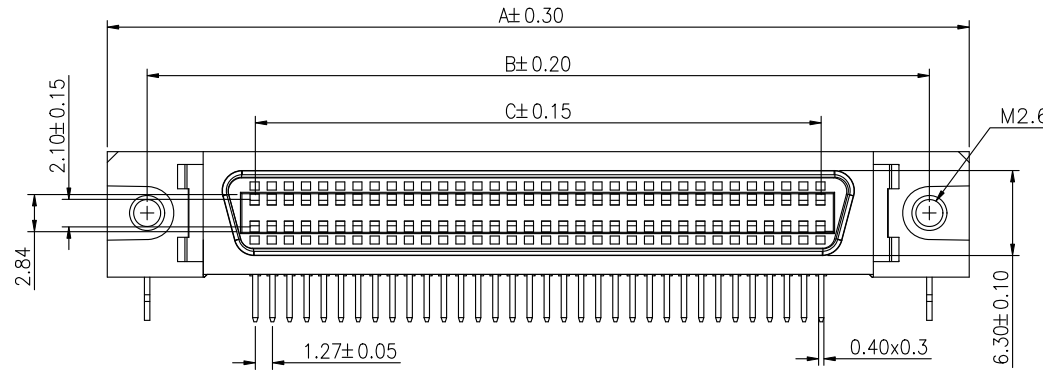


No. of Pin	DIMENSIONS				
	A	B	C	D	E
14	29.54	23.64	7.62	17.54	12.54
20	33.35	27.45	11.43	21.35	16.35
26	37.16	31.26	15.24	25.16	20.16
36	43.51	37.61	21.59	31.51	26.51
50	52.40	46.50	30.48	40.40	35.40
68	63.83	57.93	41.91	51.83	46.83
100	84.15	78.25	62.23	71.15	67.15

**Ordering Information**

**6313 FXXX R D XX M N T O X**

No. of Pins: 14,20,26,36, 50,68P,100P  
 Connector Type: R=Right Angle  
 Contact Plating: G0:Gold Flash, S0:Gold Flash/Tin, S1:3U" Gold /Tin, S2:5U" Gold /Tin, S3:10U" Gold /Tin, S4:15U" Gold /Tin, S5:30U" Gold /Tin  
 流水码

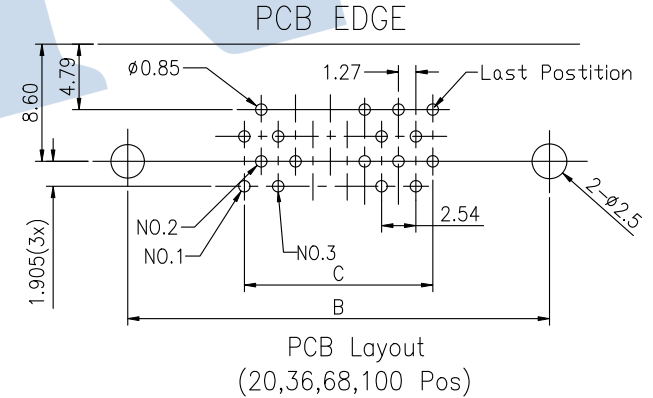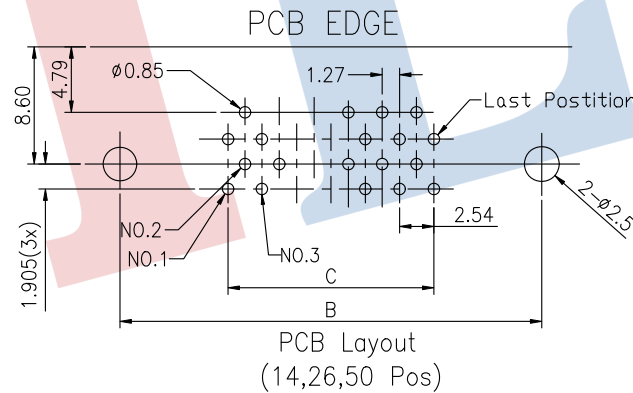

				OPERATION	DRAW	yiyusheng	2016.03.16	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司	
				X.X				UNIT	mm	SHENZHEN JINLING ELECTRONICS CO.,LTD	
				X.XX	CHECK			SIZE	A4	Tel: 86-755-27483523 Fax: 86-755-2997-5588	
A0	2016.03.16	NEW DRAWING		X.XXX				SHEET	1/1	PART NO.	6313FXXXRDXXMNT0X
REV	DATE	MODIFICATION DESCRIPTION		Angle ±3°	APPROVE			PROJ.	TITLE:	SCSI-CA型 母座 90度 锌合金壳 纵向鱼叉	
1		2		DIM TOL						7	8