

HSF RoHS




SPECIFICATIONS

Housing: Thermoplastic,UL94V-0 (PBT)
 Color: Black
 Contact:Copper Alloy
 Shell:Zinc Alloy
 Voltage Current Rating:1.0AMP.250V AC
 Insulation Resistance:500MΩ Min.
 Contact Resistance:35mΩ Max.
 Dielectric Withstanding Voltage:500V AC
 Temperature Range:-55° C to +105° C

Ordering Information

6321 M 050 S I XX MNA 0 X

No. of Pins: 50P
 Connector Type: R=Right Angle
 Contact Plating:
 S0:Gold Flash/Tin
 S1:3U" Gold /Tin
 S2:5U" Gold /Tin
 S3:10U" Gold /Tin
 S4:15U" Gold /Tin

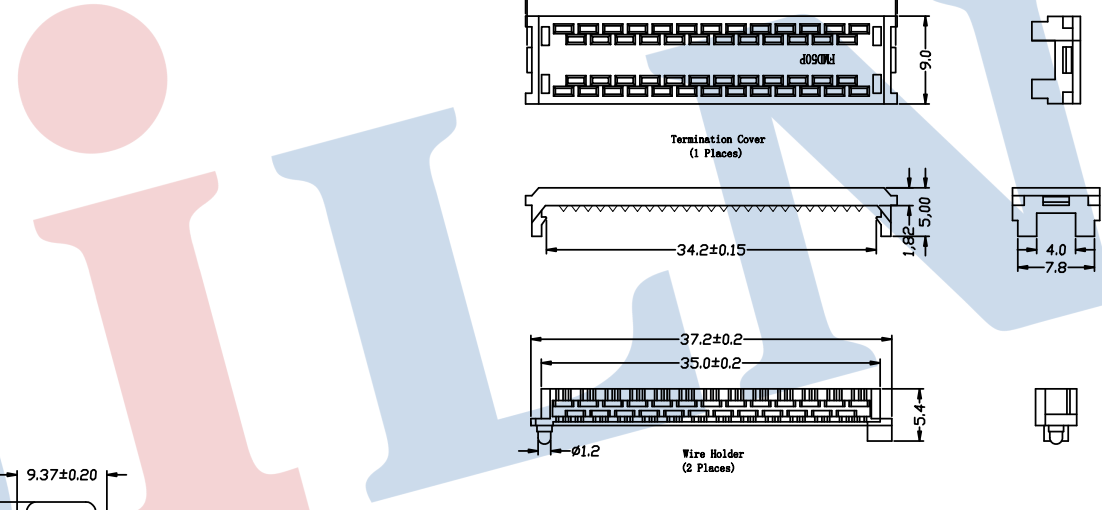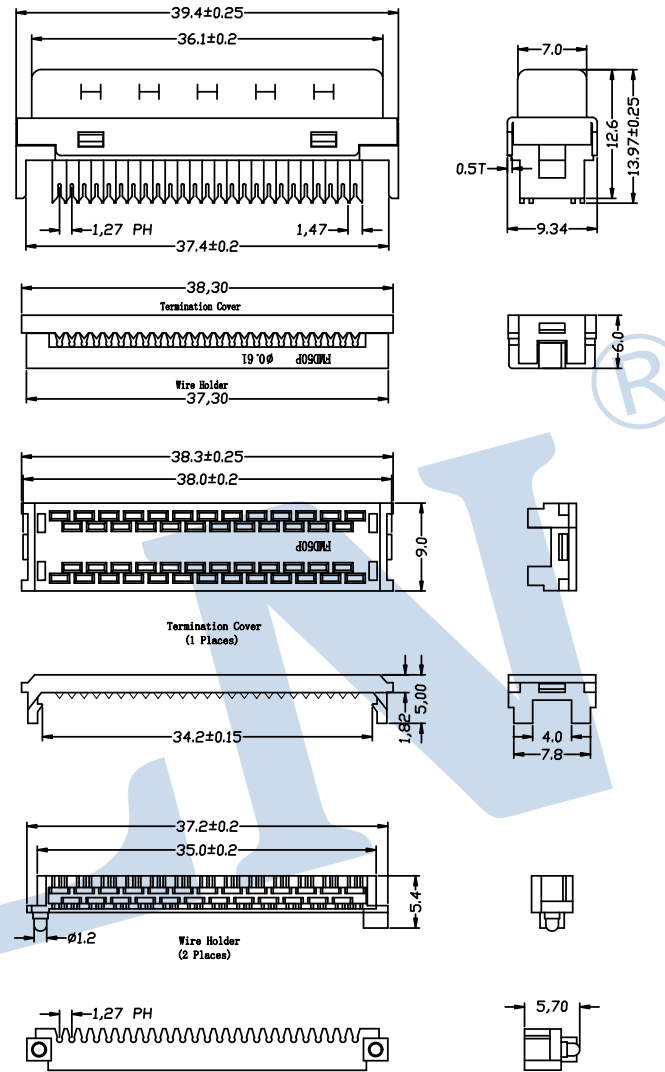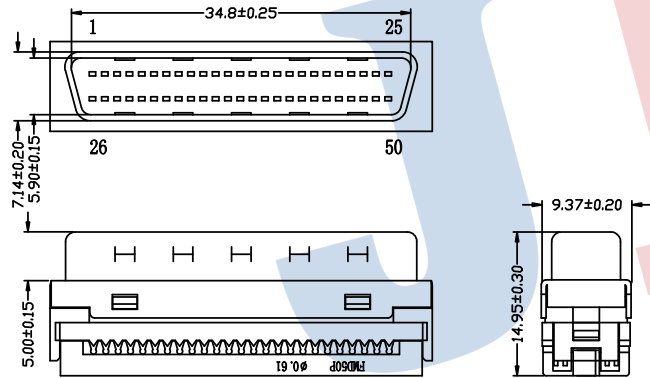

				OPERATION		DRAW	YANGHUIOU	2022.10.15	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				CHECK						SIZE	A4	
A0	2022.10.15	NEW DRAWING		APPROVE						SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			PROJ.		TITLE:	SCSI DB 50P IDC ASSEMBLY TYPE