
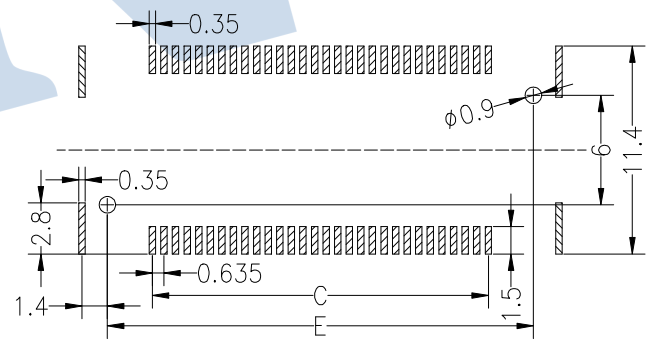
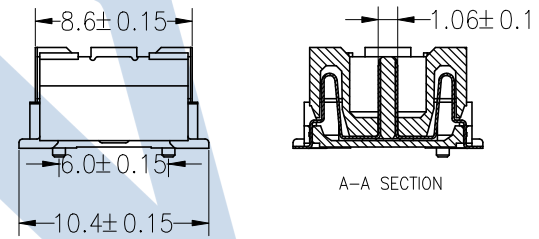
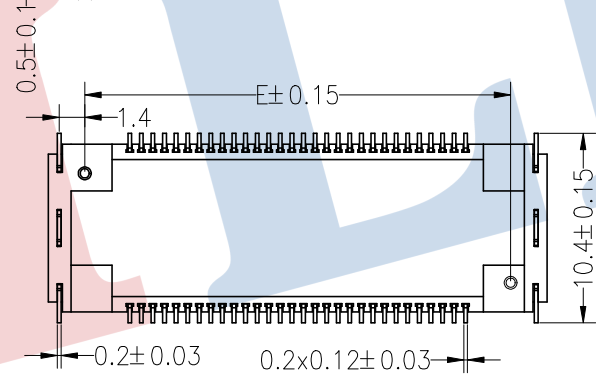
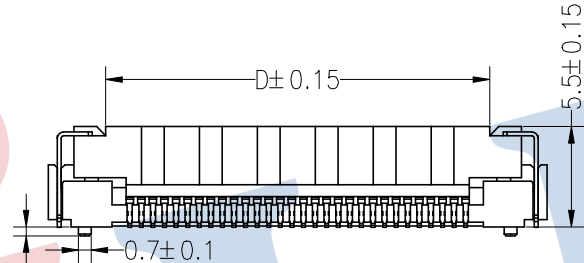


HSF RoHS

SPECIFICATIONS
PERFORMANCE
 Electrical Rating: AC/DC 50V 0.5A
 Contact Resistance: 80mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstand Volt: 500V AC/minute
 Operating Temperature: -40°C to +105°C

Material
 Contact: Phosphor Bronze Gold-Plated
 Housing: LCP UL94V0
 Max. Processing Temp: 260°C ± 5° 5S

Dimension Table					
No Of Pins	Dim A	Dim B	Dim C	Dim D	Dim E
60	27.35	20.45	18.42	21.05	23.35
80	33.70	26.80	24.77	27.40	29.70

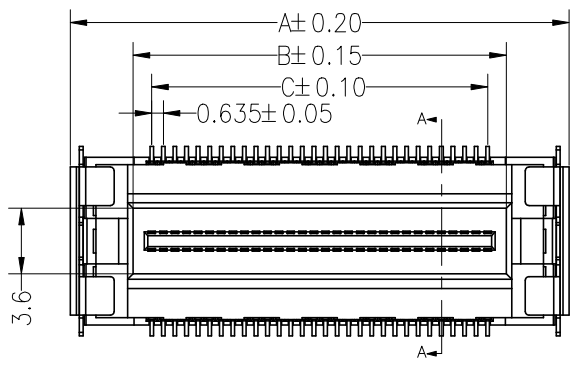

Ordering Information

3724 F XXX 055 XX X X 0X

F=Female
M=Male

No. of pins
NPin
N=60,80

Plastic Height
055=5.5mm

Contact Plating
G0: Gold Flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
S0: 1.5U" Gold/Tin
S1: 3U" Gold/Tin

Insulator Material Option
D=BK-PA46
E=BK-PA9T
F=BK-LCP

Packing
T: Tube
R: Reel
M: Reel+Mylar

				OPERATION		DRAW	Jelly Feng	2022.07.08	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	SIZE	A4				
				X.XXX	±0.10	APPROVE	SHEET	1/1				
A0	2022.07.08	NEW DRAWING		Angle	±3°			PROJ.	◆	PART NO.	3724FXXX055XXXX0X	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL					TITLE:	0.635mm 浮动式BTB NPin H5.5 Female 第二代	

