

HSF RoHS

Note:

Current Rating: 1A max.

Voltage Rating: 100 VAC.

Insulation Resistance: >1000 MΩ at
@500VDC

Withstand Voltage: 500VAC for 1 minute

Contact Resistance: 10 MΩ MAX


Operation Temperature: -40°C to +125°C

Solder Temperature: 255~265°C for 5~10sec.

Contact Material: Copper Alloy

Contact Plating: Au or Sn Over Ni

Insulator Material: Synthetic Resin (UL94V-0) Black

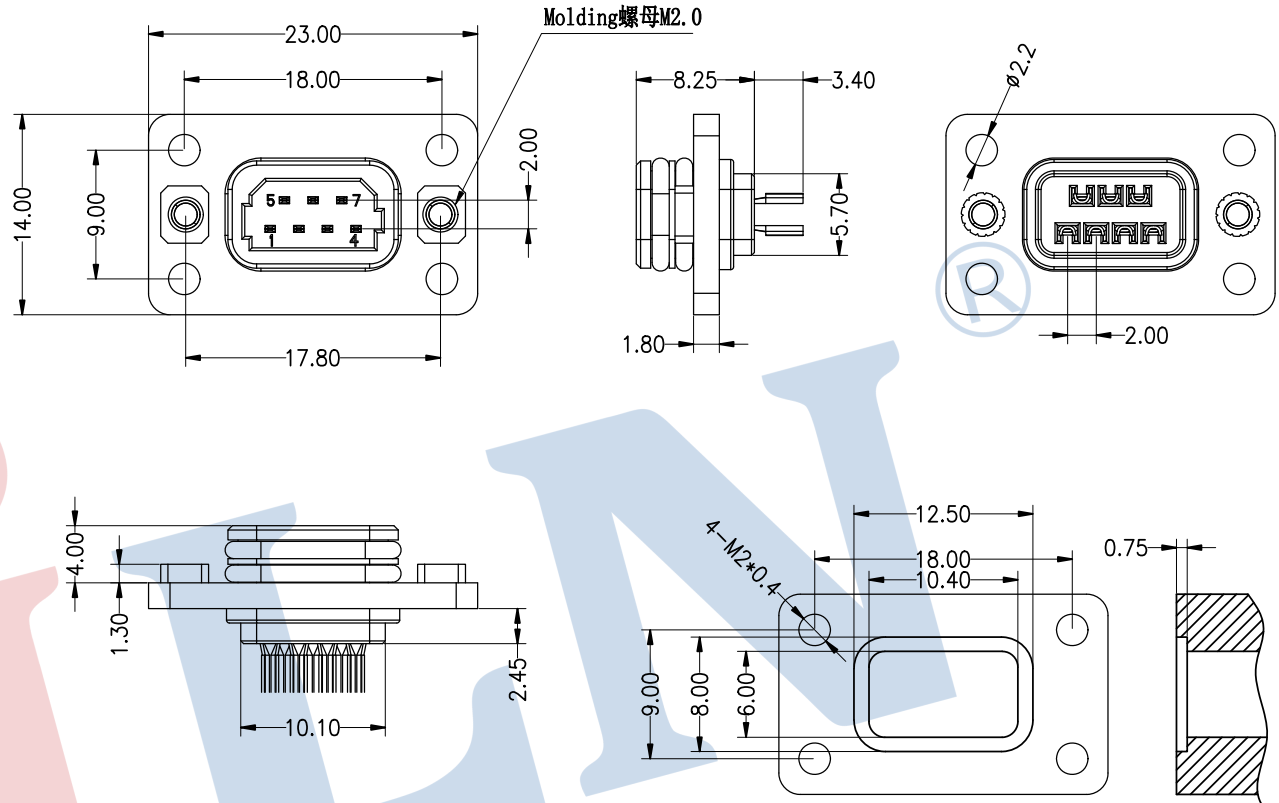

MOUNTING LAYOUT REF.

NO	NAME	Q'TY	MATERIAL	DESCRIPTION	REMARKS
1	NUT	2	COPPER ALLOY	NATURAL COLOR	M2*0.4
2	HOUSING	1	SYNTHETIC RESIN	BLACK	
3	CONTACT	7	COPPER ALLOY	PLATING GOLD	
4	SOCKET SEALING	2	SYNTHETIC RUBBER	GREEN	
5	SEALING	1	SYNTHETIC RUBBER	YELLOW	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	Tim Chu	2021.09.20	SCALE	FIT
				X.X	±0.30				UNIT	mm
				X.XX	±0.20	CHECK	Ou Yang Hui	2021.09.20	SIZE	A4
A0	2021.09.20	NEW DRAWING		X.XXX	±0.10	APPROVE	Wang Wei	2021.09.20	SHEET	1/2
				Angle	±3°				PROJ.	☉
				DIM	TOL					

JILN 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 6353-07BS1NA03
TITLE: 伺服电机编码器焊线式底座7Pin连接器/防呆型/不带线