


SPECIFICATIONS
 Rated Current: 1.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Resistance To Soldering Heat:
 260°C±5°C, 10s(LCP insulator)

Ordering Information
 35104 24 A M S XX NN X X

No. of Pins 24P
 Contact Type F:Female M:Male
 Contact Plating
 G0:Gold Flash
 S0:Gold Flash/Tin
 S1:2U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin
 S5:30U" Gold/Tin
 SN:Tin
 Packing A:Tray T:Tube

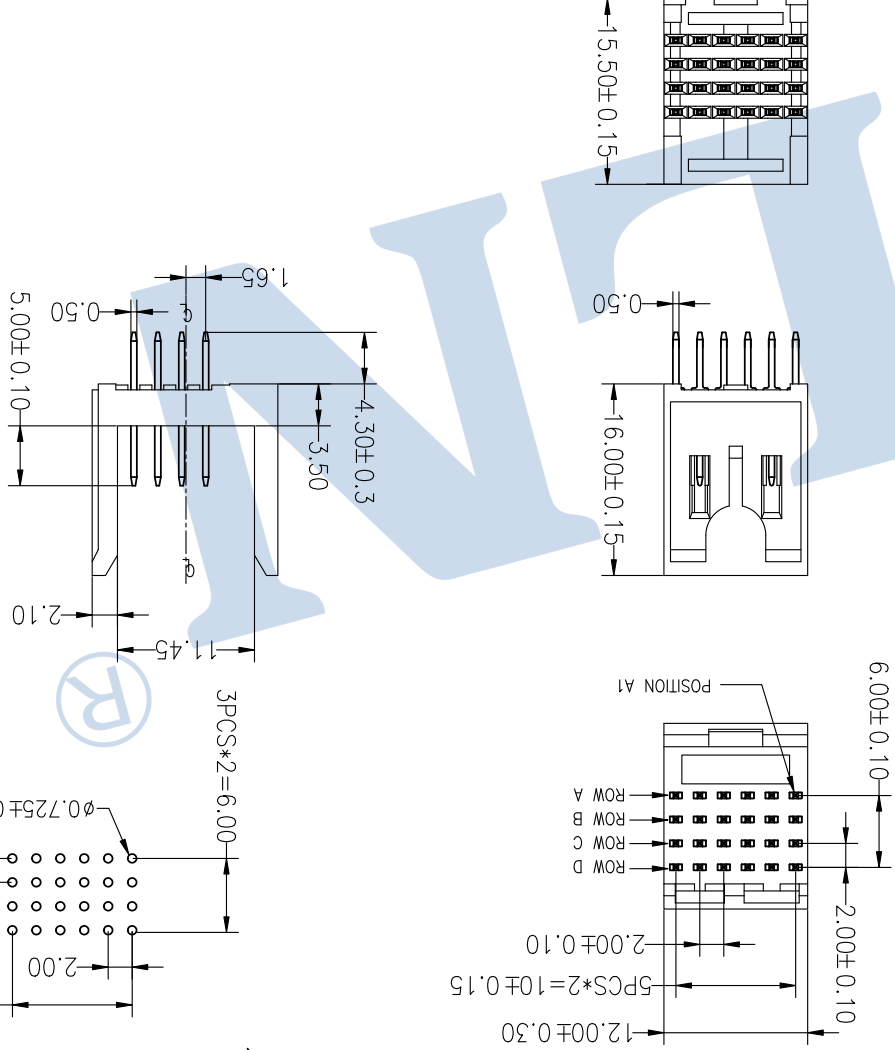

1	REV	A0	2019.09.21	NEW DRAWING	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	6	7	8	9
2	DATE						Angle	±3°		6	7	8	9
3							X.XXX	±0.10	CHECK	6	7	8	9
4							X.XX	±0.20	DRAW	6	7	8	9
5							X.X	±0.30	Y.YuSheng	6	7	8	9
6	OPERATION								Y.YuSheng	6	7	8	9
7									19.09.21	6	7	8	9
8									SCALE	6	7	8	9
9									UNIT	6	7	8	9
									mm	6	7	8	9
									SIZE	6	7	8	9
									A4	6	7	8	9
									SHEET	6	7	8	9
									1/1	6	7	8	9
									PROJ.	6	7	8	9
										6	7	8	9

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588
 PART NO. 3510424AMSSXXNNXX
 TITLE: FUTURE BUS,4*6 Male 180°

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)