



FILE NO: E302810

SPECIFICATIONS
 Rated Current: 1.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 500V AC/DC RMS
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C




Contact Material: Phosphor Bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)

Resistance To Soldering Heat:
 260°C±5°C, 10s (LCP insulator)

Ordering Information

35104 96 A F R XX P W X X

No. of Pins 96P
 Contact Type F:Female M:Male
 Contact Plating S0:Gold Flash G0:Gold Flash
 Packing At:Tray T:Tube
 SN:Tin
 S5:30U" Gold/Tin
 S4:15U" Gold/Tin
 S3:10U" Gold/Tin
 S2:5U" Gold/Tin
 S1:2U" Gold/Tin
 S0:Gold Flash/Tin

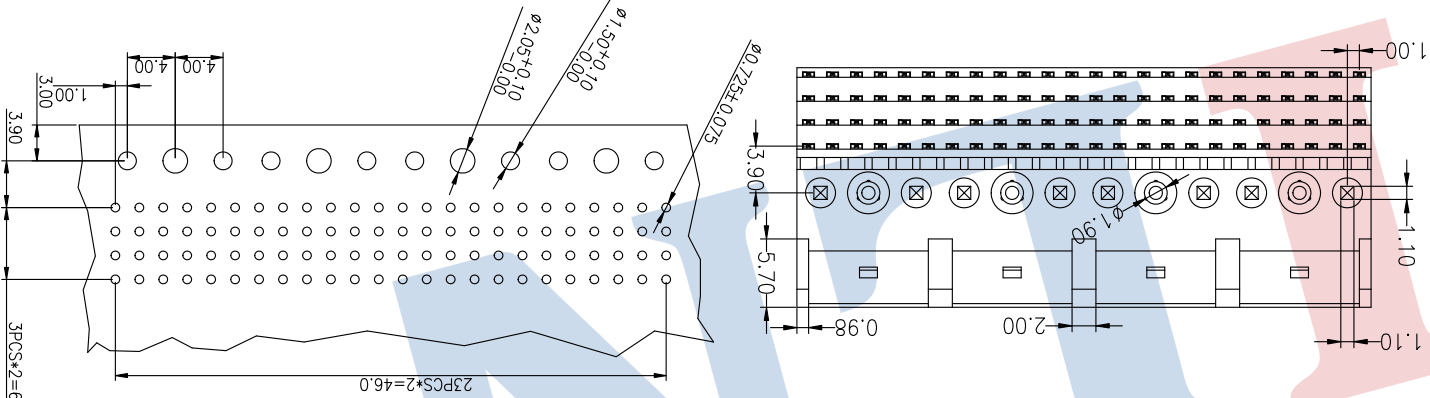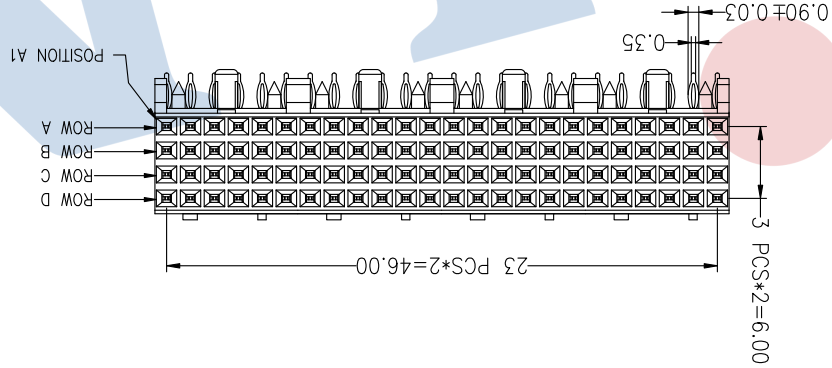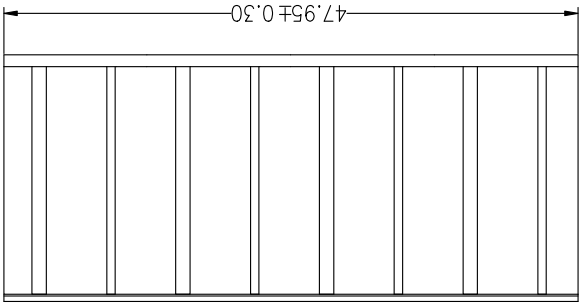

REV	A0	2019.10.29	NEW DRAWING	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	PROJ.	TITLE:	FUTURE BUS, 4*24 FEMALE PRESS FIT RIGHT ANGLE TYPE
	ANGLE	±3°									
CHECK	X.XX	±0.20	DRAW	YIYUSHENG	19.10.29	SCALE	UNIT	FIT	SCALE	UNIT	SIZE
	OPERATION	±0.30					MM				
DATE							SHEET	PART NO.			
REV							1/1	3510496AFRXXPWXX			

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588