
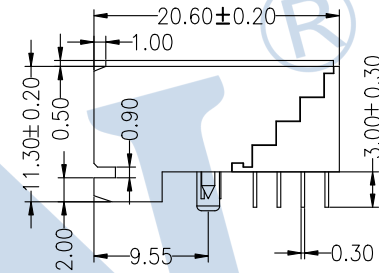
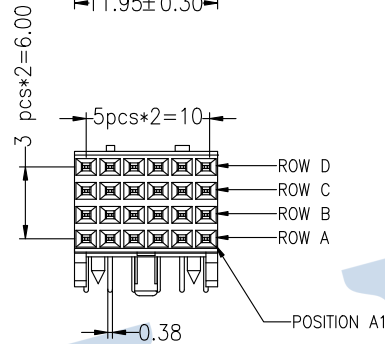


**SPECIFICATIONS**

Rated Current:1.0AMP  
 Contact Resistance:30mΩ Max  
 Withstand Voltage:500V AC/DC RMS  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 260°C±5°C, 10s(LCP insulator)



**Ordering Information**



**3510 4 24 A F R XX BW X X**

No.of Pins  
24P


Contact Type  
F:Female  
M:Male

Contact Plating  
 G0:Gold Flash  
 S0:Gold Flash/Tin  
 S1:2U" Gold/Tin  
 S2:5U" Gold/Tin  
 S3:10U" Gold/Tin  
 S4:15U" Gold/Tin  
 S5:30U" Gold/Tin  
 SN:Tin

Packing  
A:Tray  
T:Tube

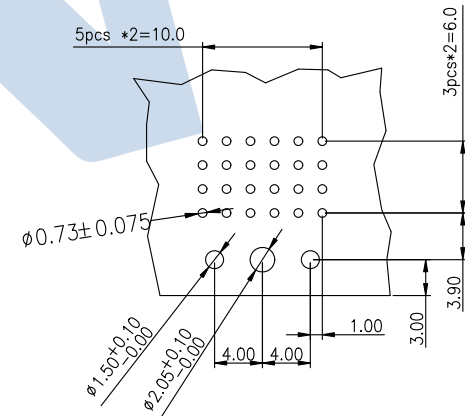

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

REV		DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YiYuSheng	19.06.09	SCALE	FIT
A0		2019.06.09	NEW DRAWING		X.X	±0.30				UNIT	mm
					X.XX	±0.20				SIZE	A4
					X.XXX	±0.10				SHEET	1/1
					Angle	±3°				PROJ.	
					DIM	TOL					

**JILN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONICS CO.,LTD  
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 3510424AFRXXBWXX

TITLE: FUTURE BUS,4\*6 Female 90°