




**SPECIFICATIONS**



Current Rating:1.0AMP  
 Contact Resistance:10mΩ Max  
 Dielectric Strength:Min 1000V RMS  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 260° C±5° C, 10s(PPS insulator)


Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

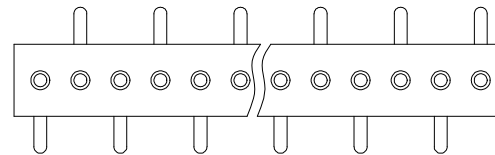

TYPE01

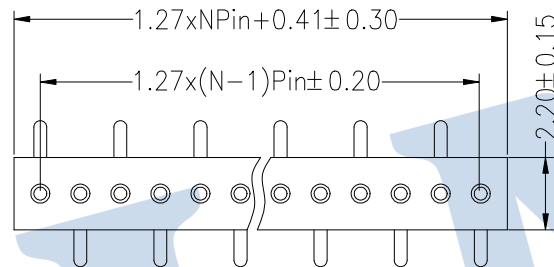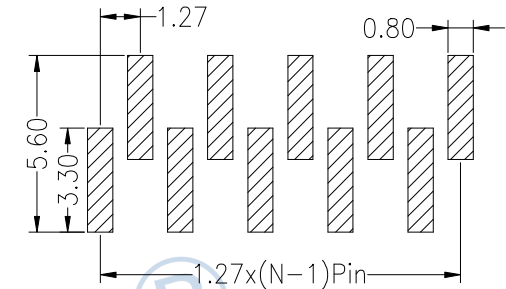



TYPE02

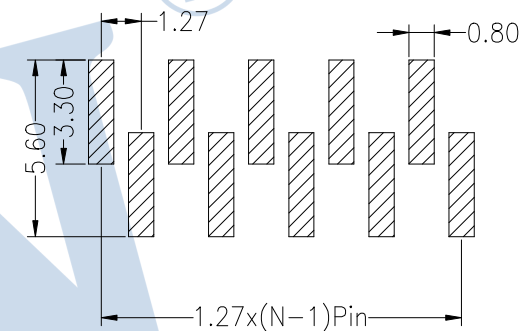

**Ordering Information**

3614 22 1 XX XX M 081 0X

- No.of Pins: 2-50
- Contact Plating: G1:Gold Flash, G2:2U" Gold, G3:3U" Gold, G4:5U" Gold, G5:10U" Gold
- Pin Length: 081=8.1mm
- Serial code

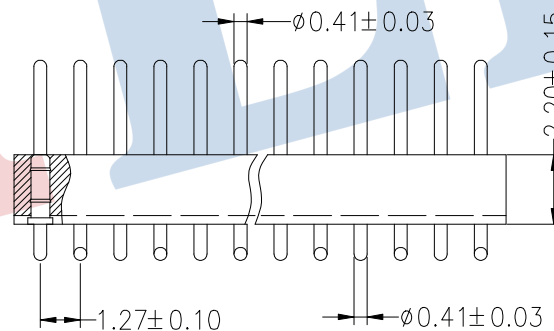

				OPERATION		DRAW	YiYuSheng	12.07.23	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	SIZE	A4				
				X.XXX	±0.10	APPROVE	SHEET	1/1				
A0	2012.07.23	NEW DRAWING		Angle	±3°			PROJ.	TITLE:	PART NO.	3614221XXXXM0810X	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL					TITLE:	1.27mm 1xNPin SMT L=8.10	