





**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 245° C±5° C, 10s(PBT insulator)  
 260° C±5° C, 10s(PA6T&PA9T&LCP insulator)



Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE± 0.05)

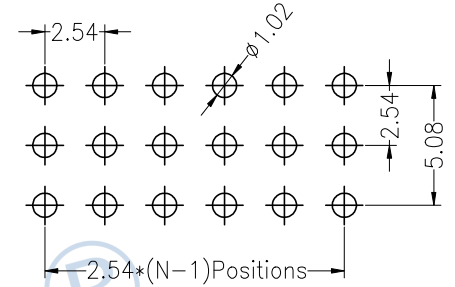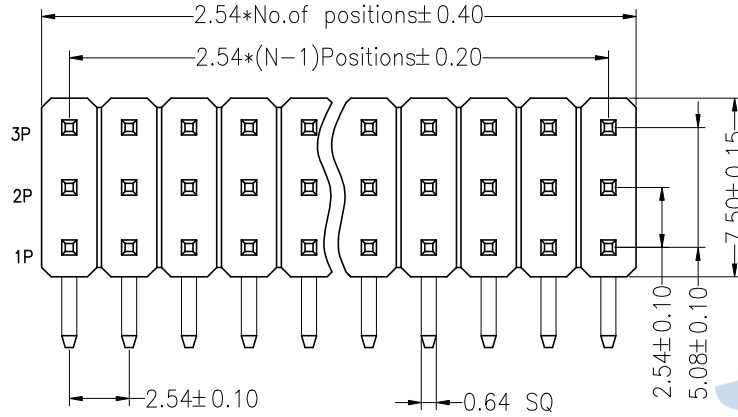

**Ordering Information**

1225 13 XX X N XX R XXX X 0X

- High.of Plastic 25=H2.5mm
- No.of Pins Per Row 02~40P
- Insulator Material Option A=BK-PBT C=BK-PA6T E=BK-PA9T F=BK-LCP
- Contact Plating G0:Gold Flash G1:1u" Gold G2:1.5u" Gold G3:2u" Gold G4:3u" Gold G5:5u" Gold G6:10u" Gold G7:15u" Gold G8:30u" Gold S0:Gold Flash/Tin SN:Tin
- Pin Length
- Packing 0=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar

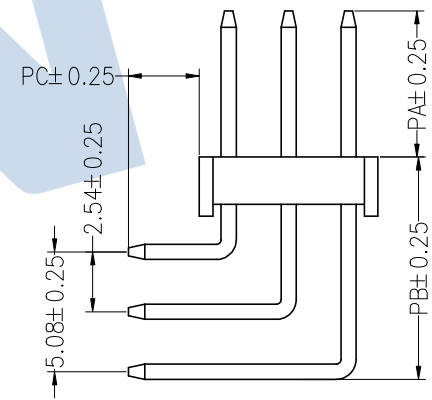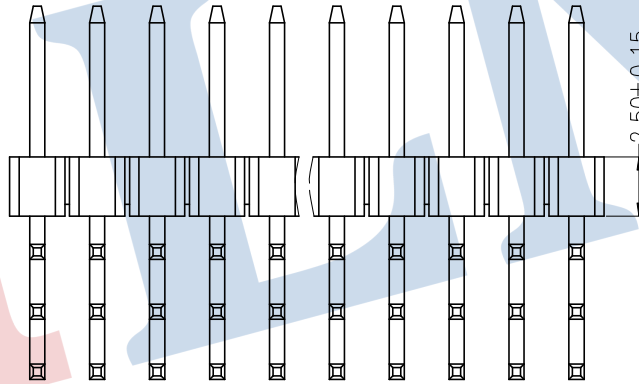

Dimension antitheses list			
ITEM	PA	PB	PC
Alternate	XXX	XXX	XXX

		OPERATION		DRAW	RICH LIN	23.06.10	SCALE	FIT
		X.X	± 0.30					
		X.XX	± 0.20	CHECK			UNIT	mm
		X.XXX	± 0.10				SIZE	A4
A0	2023.06.10	NEW DRAWING		APPROVE			SHEET	1/1
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL		PROJ.	◆ □

**JILN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONICS CO.,LTD

Tel: 86-755-27483253 Fax: 86-755-2997-5992

PART NO. 122513XXXNXXRXXX0X

TITLE: 2.54mm Pin Header 90°正弯